

CIRCUIT DIAGRAM

P.C.B LAND PATTERN

SS-B70-x-S246



SLIDER COLOR :

Black : B

White : W

SPECIFICATIONS

Rating	0.3A 6V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	130 ± 50gf
Operating Life	10,000 cycles

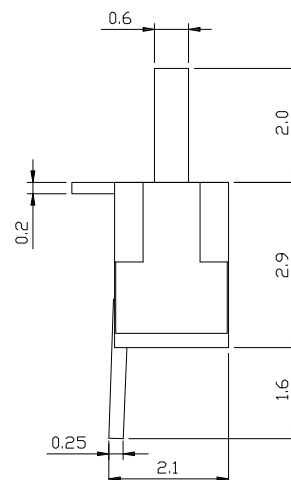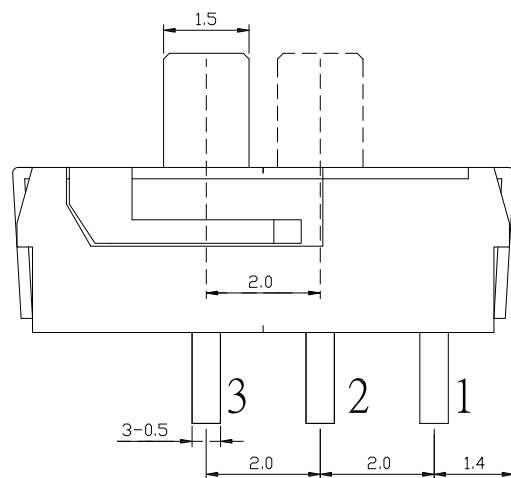

E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated
D	CLIP	1	BeCu	Ag plated
C	COVER	1	STAINLESS STEEL	
B	CASE	1	PA6T	Black
A	SLIDER	1	PPA	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

7	更新為A0版	Jack	080417
6	新增PIN編號	Jack	030816
5	更新顏色選項	Jack	101415
4	更新圖面	Jack	102114
3	更新材質及SPEC	Jack	110613
2	更新材質	Jack	103113
1	更新圖面視圖位置	Jack	102313
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S



UNITS MM

DRAWN BY:	DATE
Jack Lu	08/04/17
CHECKED BY:	DATE
Jacky Chen	08/04/17
APPROVED BY:	DATE
Tony Kao	08/04/17

MAT'L	TITLE	SWITCH
FINISH	MODLE	SLIDE SWICTH
SCALE	1 : 1	DWG NO. SS-B70-x-S246
SHEET NO.	1 of 1	PART NO. SS-B70-x-S246
		SIZE A4
		VER A0