



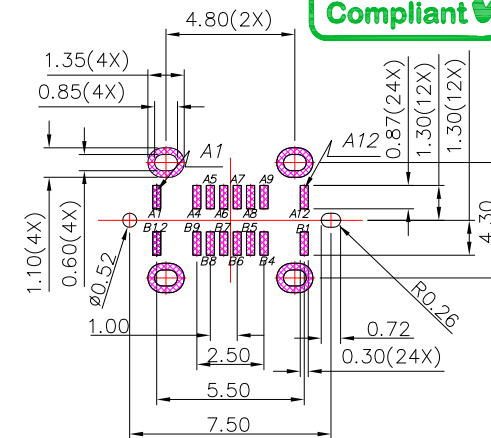

SBC-160VSE6-20x-S331

鍍層厚度:

Blank : 1u"
2 : 15u"
3 : 30u"

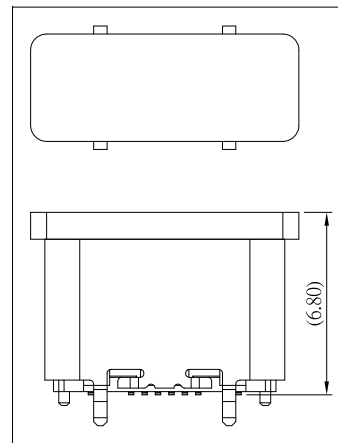

RECOMMENDED P.C.B. LAYOUT

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	Vbus	B9	Vbus
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	Vbus	B4	Vbus
A12	GND	B1	GND

SPECIFICATIONS

Electrical:


- 1.Rating: 5.0V DC/AC , 5.0A
- 2.Dielectric Withstand Voltage: 100V AC
- 3.Contact Resistance: 40 mΩ Max
- 4.Insulation Resistance: 100 MΩ Min

Mechanical:


- 1.Connector Mate and Unmate Force
 - 1.1 Mate force: 5~20 N
 - 1.2 Unmate force: 8~20 N

Material:


- 1.Housing: LCP
 - 2.Contact: C1815
 - 3.Shell: SUS
- Finish:**
- 1.Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls ;
Nickel under plated overall
 - 2.Shell: Nickel under Plated surface layer



SECTION: A-A

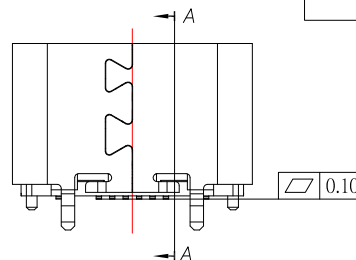

USB TYPE C PLUG

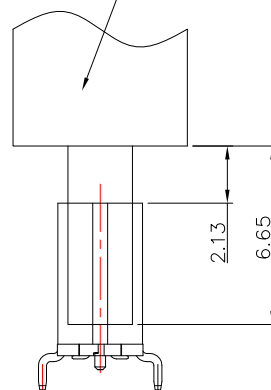

FEMALE AND MALE MATCHING DRAWING

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 02/10/23
DATE: 02/10/23
DATE: 02/10/23

MAT'L
FINISH
SCALE
SHEET NO.

1 : 1
1 of 1

TITLE: CONNECTOR
MODLE: TYPE C 16P 180 度 SMT 帶定位柱 H5.80
DWG NO. SBC-160VSE6-20x-S331
PART NO. SBC-160VSE6-20x-S331

SIZE: A4
VER: R