

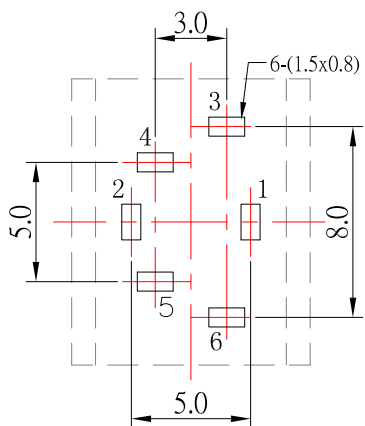


SCHEMATIC



**P.C.B LAYOUT
TOP VIEW**

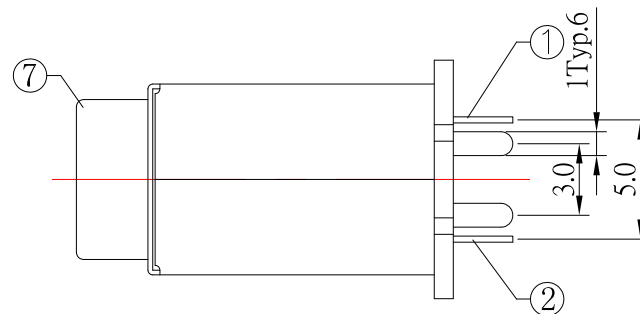

SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

| NO. | DESCRIPTION | QTY | MATERIAL | PLATING |
|-----|-----------------|-----|-----------------|------------|
| 9 | COAT | 1 | SUS301 | |
| 8 | COVER | 1 | PBT | |
| 7 | HOUSING | 1 | PBT | |
| 6 | 6# CONTACT FOOT | 1 | PHOSPHOR BRONZE | Ag-Plating |
| 5 | 5# CONTACT FOOT | 1 | PHOSPHOR BRONZE | Ag-Plating |
| 4 | 4# CONTACT FOOT | 1 | BRASS | Ag-Plating |
| 3 | 3# CONTACT FOOT | 1 | PHOSPHOR BRONZE | Ag-Plating |
| 2 | 2# CONTACT FOOT | 1 | PHOSPHOR BRONZE | Ag-Plating |
| 1 | 1# CONTACT FOOT | 1 | PHOSPHOR BRONZE | Ag-Plating |

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3°

3RD. ANGEL'S UNITS MM

| | | | | |
|--------------|----------|-----------|----------|------------------|
| DRAWN BY: | DATE | MAT'L | TITLE | JACK |
| Jack Lu | 01/17/14 | | | |
| CHECKED BY: | DATE | FINISH | MODLE | PHONE JACK |
| Jacky Chen | 01/17/14 | | | |
| APPROVED BY: | DATE | SCALE | DWG NO. | PJ-D3098A-1-S125 |
| Tony Kao | 01/17/14 | 1 : 1 | | |
| | | SHEET NO. | PART NO. | PJ-D3098A-1-S125 |
| | | 1 of 1 | | |

| ITEM NO. | DESCRIPTION | DRAWN | DATE |
|----------|-------------|-------|--------|
| 2 | 更新料號 | Jack | 011714 |
| 1 | 更新料號 | Jack | 101413 |