
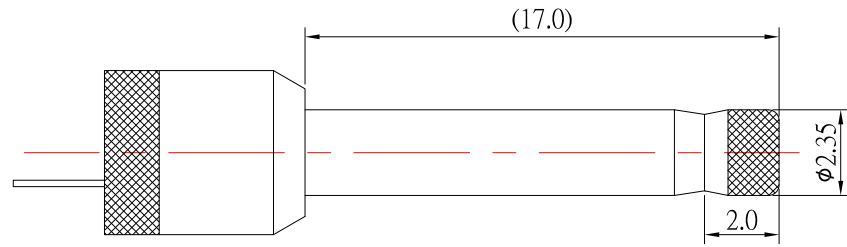


P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)

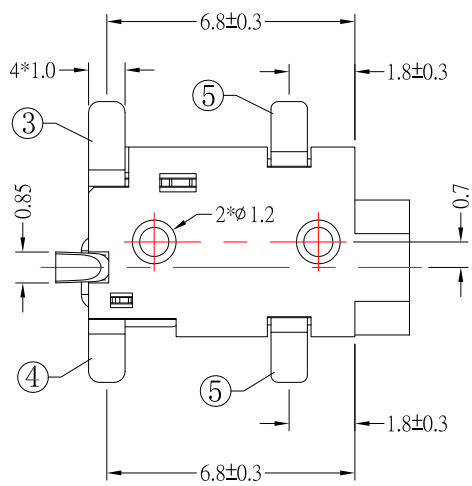

RECOMMENDED PLUG

SPECIFICATION

- 1.Rating : DC 16V , 1.0A
- 2.Contact resistance : ≤ 50m Ω
- 3.Insulation resistance : ≥ 100M Ω
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles ◦

MODEL NO.	DC-065D-0.65
SCHEMATIC	

6	STOPPER	1	BRASS	Ag-Plating
5	SUPPORT	2	BRASS	Ag-Plating
4	CONTACT FOOT	1	BRASS	Ag-Plating
3	SPRING	1	PHOSPHOR BRONZE	Ag-Plating
2	PIN	1	BRASS	Ag-Plating
1	HOUSING	1	PA10T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3°

3RD. ANGEL'S UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	08/15/23		MODLE	DC JACK
CHECKED BY:	DATE	FINISH	SCALE	1 : 1
Jacky Chen	08/15/23		DWG NO.	DC-065D-0.65-S124
APPROVED BY:	DATE	SHEET NO.	PART NO.	DC-065D-0.65-S124
Tony Kao	08/15/23	1 of 1		

3	更新HOUSING材質	Jack	081523
2	更新底部樣式	Jack	111722
1	更新料號	Jack	111622
ITEM NO.	DESCRIPTION	DRAWN	DATE

SIZE	A4
VER	R3