
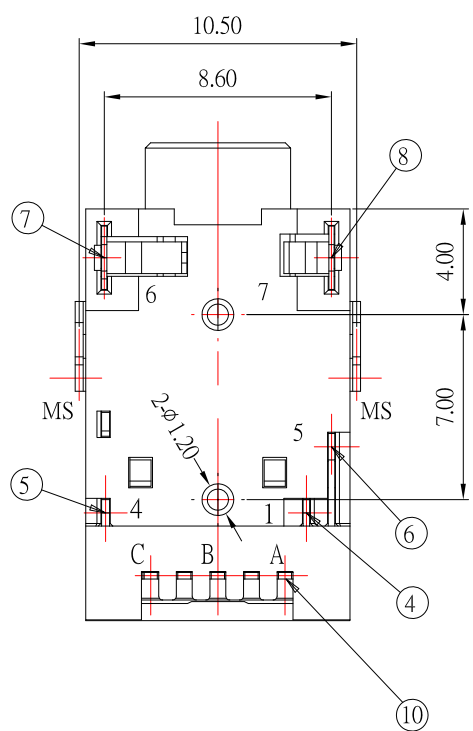



OJ-0015S-RXx-S214

1	16 Mbps
2	25 Mbps



Recommended PCB Layout  
<BOTTOM VIEW>

ITEM	DESCRIPTION	MATERIAL	FINISH	QTY'	NOTE
⑩	DRIVE IC RX			1	
⑨	SUPPORT	BRASS	Ni-Sn	1	TYCO LOGO
⑧	P CONTACT	PBS	Au	1	
⑦	D/A CONTACT	PBS	Au	1	
⑥	GND CONTACT	PBS	Au	1	
⑤	T CONTACT	PBS	Au	1	
④	R CONTACT	PBS	Au	1	
③	MINOR HOUSING	PA9T		1	PINK
②	COVER	PA9T		1	BLACK
①	HOUSING	PA9T		1	

**CONTACT** 建倚科技股份有限公司  
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:	Up to 5 ±0.2	3RD. ANGEL'S	UNITS	MM
	Above 5 ~ 15 ±0.3			
	Above 15 ~ 30 ±0.4			
	Above 30 ~ 50 ±0.5			
	Angle ±0.3			

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	06/07/22			
CHECKED BY:	DATE	FINISH	MODLE	OPTICAL JACK (接收端)
Jacky Chen	06/07/22			
APPROVED BY:	DATE	SCALE	DWG NO.	OJ-0015S-RXx-S214
Tony Kao	06/07/22	1 : 1		
		SHEET NO.	PART NO.	OJ-0015S-RXx-S214
		1 of 1		

ITEM NO.	DESCRIPTION	DRAWN	DATE
3	更新MINOR HOUSING材質顏色	Jack	060722
2	更新傳輸速率選項	Jack	112219
1	新增傳輸速率選項	Jack	103018