

PCB LAYOYT

SPECIFICATION

Electrical :



- 1.Rating: 1.0A
- 2.Contact Resistance: 50 mΩ Max.
- 3.Insulation Resistance: 1000 MΩ Min.
- 4.Dielectec Withstanding Voltage: 250 V AC
- 5.Operating Temperature: -30°C ~ +80°C.

Material:

- 1.Housing: LCP
- 2.Contact: Phosphor Bronze
- 3.Shell: SUS

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface laye

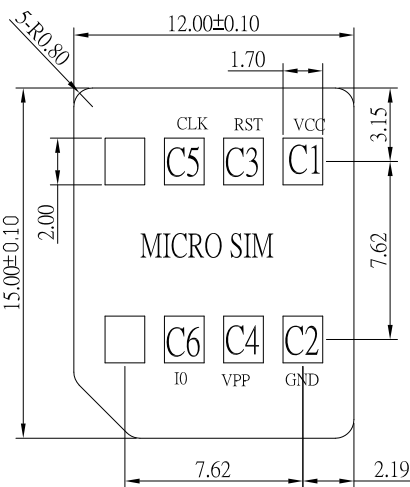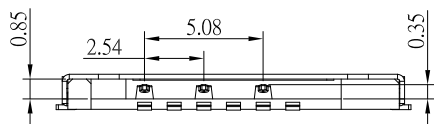

PIN NO.	NAME	PIN NO.	NAME
C1	VCC	C4	VPP
C2	GND	C5	CLK
C3	RST	C6	I/O

插卡示意图

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 10/11/23
DATE: 10/11/23
DATE: 10/11/23

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO.: 1 of 1

TITLE: CONNECTOR
MODLE: MICRO SIM 6PIN H1.5 掀蓋
DWG NO.: MSIM-06H150-S267
PART NO.: MSIM-06H150-S267

SIZE: A4
VER: R

ITEM NO.	DESCRIPTION	DRAWN	DATE