
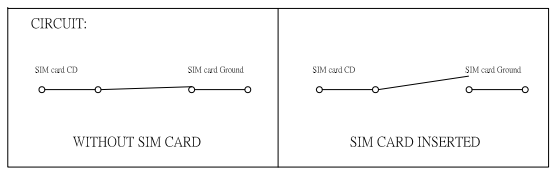


SIM pin assignment	
PIN#	Name
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved

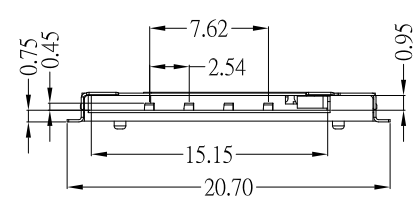

SPECIFICATION

- Electrical :
- 1.Current Rating: 0.5A
 - 2.Voltage Rating: 40V
 - 3.Contact Resistance: 30 mΩ Max.
 - 4.Insulation Resistance: 1000 MΩ Min.
- Environmental:
- 1.Operating Temperature: -40°C ~ +85°C.

- Material:**
- 1.Housing: LCP
 - 2.Contact: Phosphor Bronze
 - 3.Shell: Stainless Steel
- Finish:**
- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
 - 2.Shell: Nickel under Plated surface layer

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	06/13/23			
CHECKED BY:	DATE	FINISH	MODLE	SIM-PSUH PUSH 8P+1P有柱
Jacky Chen	06/13/23			
APPROVED BY:	DATE	SCALE	DWG NO.	SIM-0081014-S267
Tony Kao	06/13/23	1 : 1	PART NO.	SIM-0081014-S267
		SHEET NO.	1 of 1	SIZE A4
				VER R1