


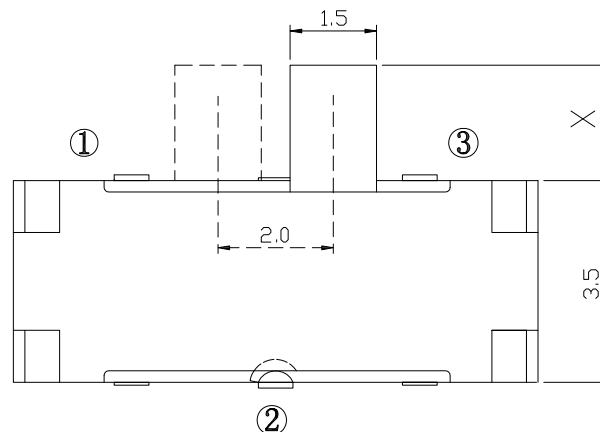





Model No.	X (mm)
SS-B45	2.0
SS-B45A	3.0
SS-B45C	4.0

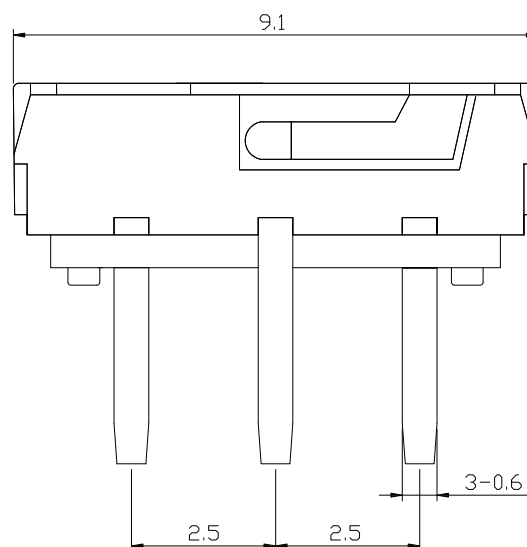

CIRCUIT DIAGRAM

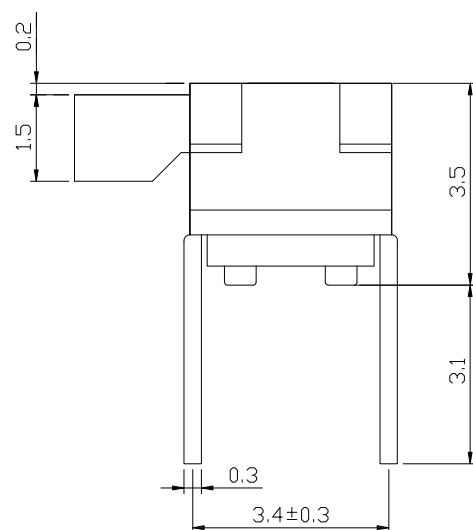

SPECIFICATIONS

Rating	0.3A 6V DC
Insulation Resistance	50M Ω Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1m
Contact Resistance	100m Ω Max.
Operating Force	200 $\pm$ 50gf
Operating Life	10,000 cycles

E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated
D	CLIP	1	PHOSPHOR BRONZE	Ag plated
C	COVER	1	SUS	
B	CASE	1	PA46	Black
A	SLIDER	1	PA46	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
DATE 04/09/21	MAT'L		TITLE	SWITCH
DATE 04/09/21	FINISH		MODLE	SLIDE SWICTH
DATE 04/09/21	SCALE	1 : 1	DWG NO.	SS-B45x-B-S246
	SHEET NO.	1 of 1	PART NO.	SS-B45x-B-S246

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2
	Above 5 ~ 15	± 0.3
	Above 15 ~ 30	± 0.4
	Above 30 ~ 50	± 0.5
	Angle	± 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	04/09/2

CHECKED BY:	DATE
Jacky Chen	04/09/2

APPROVED BY:	DATE
Tony Kao	04/09/2