


P.C.B LAYOUT
TOP VIEW

SCHMATIC

SPECIFICATION

1. Rating : DC 30V 0.5A ;
2. Contact resistance : $\leq 0.03 \Omega$;
3. Insulation resistance : $\geq 100M \Omega$;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-20N;
6. Life test : 5,000 cycles °

PJ-D3025D	PJ-D3025D-1	PJ-D3025D-2

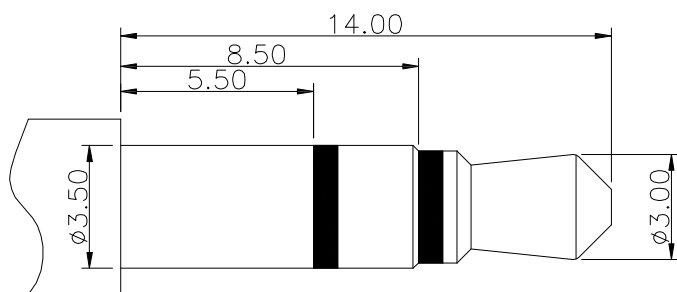

ø3.50mm 3 POLE PLUG

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
⑦	COVER	1	PBT	
⑥	HOUSING	1	PBT	
⑤	CURVE PIECE	1	BRASS	Sn-Plating
④	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
③	CURVE PIECE	1	BRASS	Sn-Plating
②	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
①	FLAT PIECE	1	BRASS	Sn-Plating

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	11/24/17		MODLE	PHONE JACK
CHECKED BY:	DATE	FINISH	SCALE	1 : 1
Jacky Chen	11/24/17		DWG NO.	PJ-D3025D-x-S124
APPROVED BY:	DATE	SHEET NO.	PART NO.	PJ-D3025D-x-S124
Tony Kao	11/24/17	1 of 1		

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新PLUG尺寸	Jack	112417