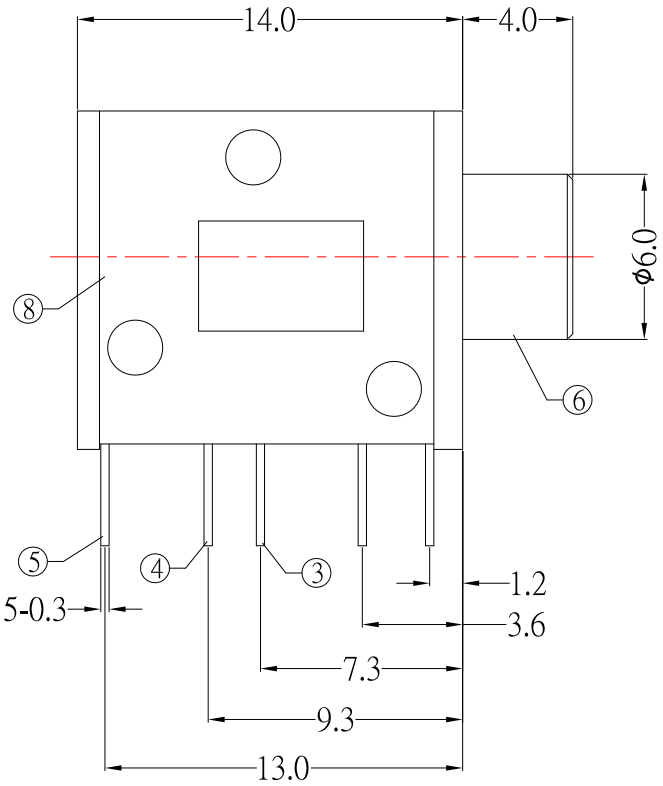
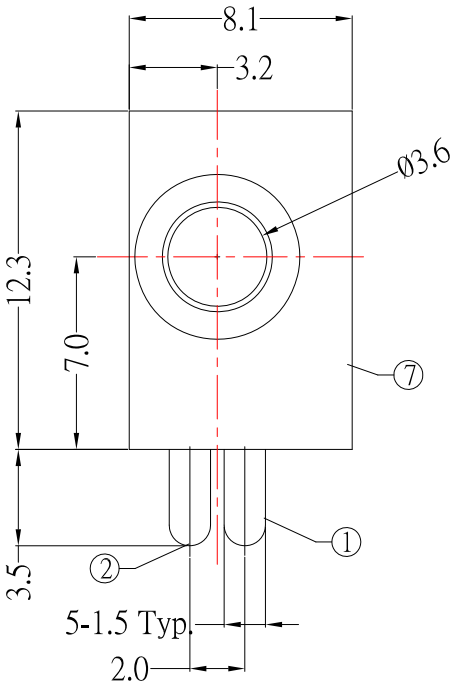
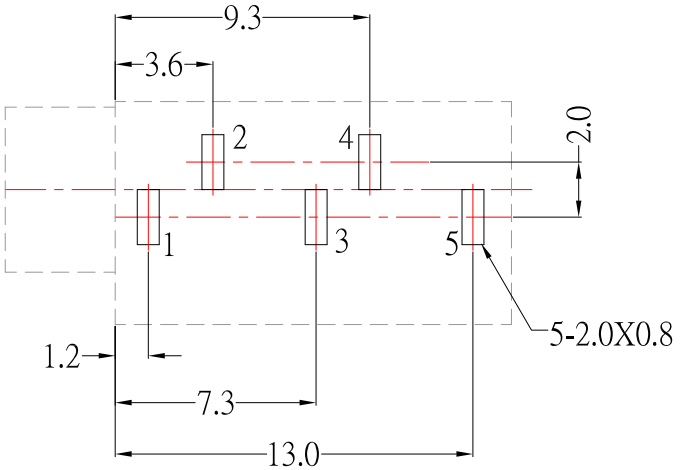


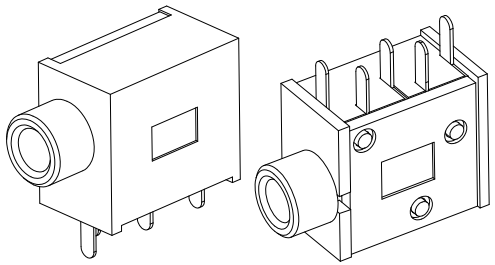









P.C.B LAYOUT
TOP VIEW

SPECIFICATIONS

1.Rating ：DC 30V 0.5A；
2.Contact resistance：≤0.03Ω；
3.Insulation resistance：≥100MΩ；
4.Withstand voltage：500VAC ；
5.Insertion and extraction force：3-20N;
6.life test：5,000 cycles。



SCHEMATIC

PJ-D3025	PJ-D3025-1	PJ-D3025-2	PJ-D3025-3	PJ-D3025-4
				

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
⑧	COVER	1	PBT	
⑦	HOUSING	1	PBT	
⑥	AXIS SUPPORT	1	BRASS	Ni-Plating
⑤	CURVE PIECE	1	BRASS	Sn-Plating
④	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
③	CURVE PIECE	1	BRASS	Sn-Plating
②	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
①	FLAT PIECE	1	BRASS	Sn-Plating

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新爲A0版	Jack	100516

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2; Above 5 ~ 15 ±0.3; Above 15 ~ 30 ±0.4; Above 30 ~ 50 ±0.5; Angle ±0.3°

3RD. ANGEL'S | UNITS MM

DRAWN BY: Jack Lu	DATE 10/05/16	MAT'L	TITLE JACK
CHECKED BY: Jacky Chen	DATE 10/05/16	FINISH	MODLE PHONE JACK
APPROVED BY: Tony Kao	DATE 10/05/16	SCALE 1 : 1	DWG NO. PJ-D3025-S124 SIZE A4
		SHEET NO. 1 of 1	PART NO. PJ-D3025-S124 VER A0