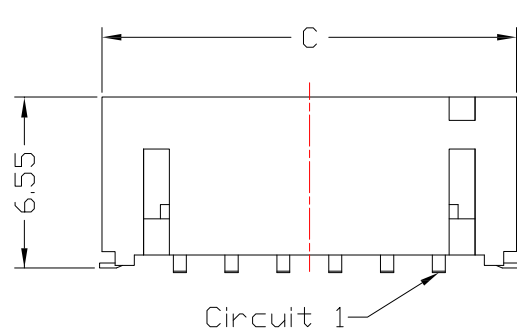


SPECIFICATIONS

Current rating : 2.0A AC , DC

Voltage rating : 250V AC , DC

Temperature rating : -25°C ~ +85°C

Insulation resistance : 100M Ω min.



Withstand voltage : 200V AC/minute

Contact resistance : 20m Ω /Max

Material:

Housing : LCP, UL94V-0

Contact : Phosphor Bronze,Tin over Nickel

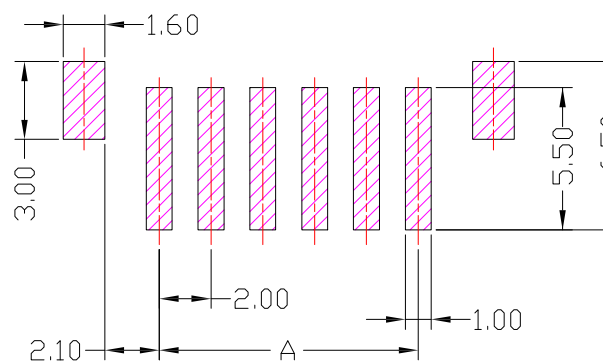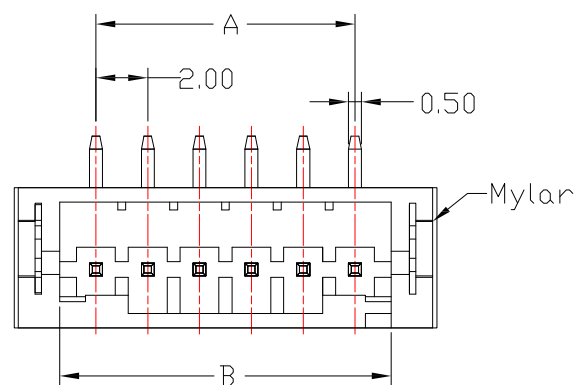

P.C.B LAYOUT MOUNTING PATTERN

Circuits	Dimensions (mm)		
	A	B	C
02	2.00	4.80	8.00
03	4.00	6.80	10.00
04	6.00	8.80	12.00
05	8.00	10.80	14.00
06	10.00	12.80	16.00
07	12.00	14.80	18.00
08	14.00	16.80	20.00
09	16.00	18.80	22.00
10	18.00	20.80	24.00
11	20.00	22.80	26.00
12	22.00	24.80	28.00
13	24.00	26.80	30.00
14	26.00	28.80	32.00
15	28.00	30.80	34.00
16	30.00	32.80	36.00



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
11/24/22
DATE
11/24/22
DATE
11/24/22

MATL	TITLE	CONNECTOR
FINISH	MODLE	WAFER P : 2.0mm SMT 180度
SCALE	DWG NO.	WF-2001VSxx-S304
SHEET NO.	PART NO.	WF-2001VSxx-S304

SIZE
A4
VER
R2