



P.C.B LAYOUT MOUNTING PATTERN

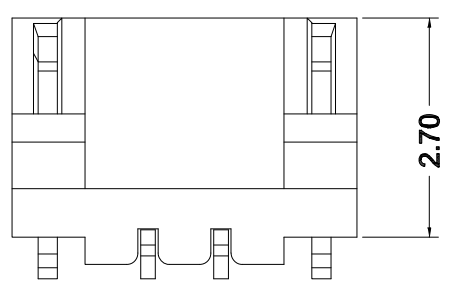

SPECIFICATIONS

Current rating : 0.5A AC , DC
 Voltage rating : 30V AC , DC
 Temperature rating : -25°C ~ +85°C
 Insulation resistance : 100MΩ min.
 Withstand voltage : 200V AC/minute
 Contact resistance : 20mΩ /Max
 Material:
 Housing : Nylon 6T, UL94V0
 Pin : Phosphor Bronze / Tin Plated

PART NO.	DIMENSION (mm)	
	A	B
WF-0800VS02	0.80	3.80
WF-0800VS03	1.60	4.60
WF-0800VS04	2.40	5.40
WF-0800VS05	3.20	6.20
WF-0800VS06	4.00	7.00
WF-0800VS08	5.60	8.60
WF-0800VS10	7.20	10.20
WF-0800VS12	8.80	11.80
WF-0800VS14	10.40	13.40
WF-0800VS15	11.20	14.20
WF-0800VS16	12.00	15.00
WF-0800VS17	12.80	15.80
WF-0800VS20	15.20	18.20
WF-0800VS22	16.80	19.80

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3

3RD. ANGEL'S UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	11/12/12		MODLE	WAFER 0.8 刺破式 SMT 180度(JST)
CHECKED BY:	DATE	FINISH	SCALE	1 : 1
Jacky Chen	11/12/12		DWG NO.	WF-0800VSxx-S208
APPROVED BY:	DATE	SHEET NO.	PART NO.	WF-0800VSxx-S208
Tony Kao	11/12/12	1 of 1		

ITEM NO.	DESCRIPTION	DRAWN	DATE