
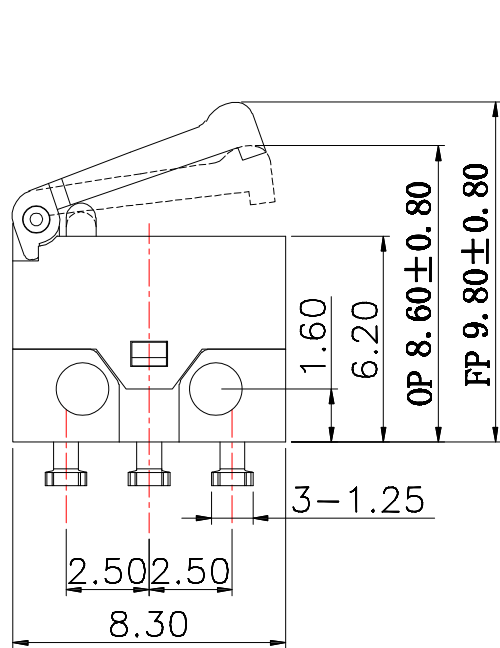
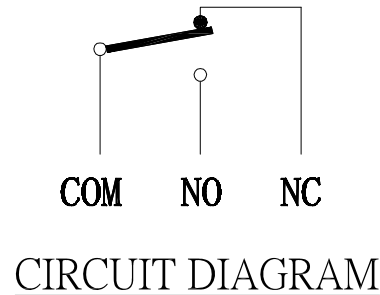


P.C.B LAYOUT

SPECIFICATIONS

Rating	DC 30V, 0.1A.
Contact Resistance	100mΩ Max.
Insulation Resistance	50MΩ Min.
Operating Force	30±10 gf
Mechanical Life	20,000 cycles

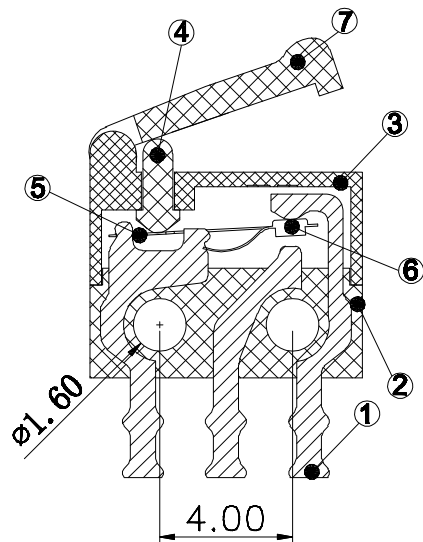

CIRCUIT DIAGRAM

7	GUIDANCE PLATE	PA66	1	BLACK
6	CONTACT	COPPER ALLOY	1	Ag PLATED
5	SHRAPNEL	BeCu	1	Ag PLATED
4	KNOB	PA66	1	GRAY
3	COVER	PA66	1	BLACK
2	BASE	PA66	1	BLACK
1	TERMINAL	BRASS	3	Ag PLATED
NO	NAME	MATERIAL	QTY	FINISHING



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
05/05/21
DATE
05/05/21
DATE
05/05/21

MATL
FINISH
SCALE

TITLE
MODLE
DWG NO.

SWITCH
MICRO SWITCH
1 : 1

PART NO.

SSM-001AR-30-S379

SSM-001AR-30-S379

SIZE
A4
VER
R1

1

更新料號

Jack

050521

DESCRIPTION

DRAWN

DATE