


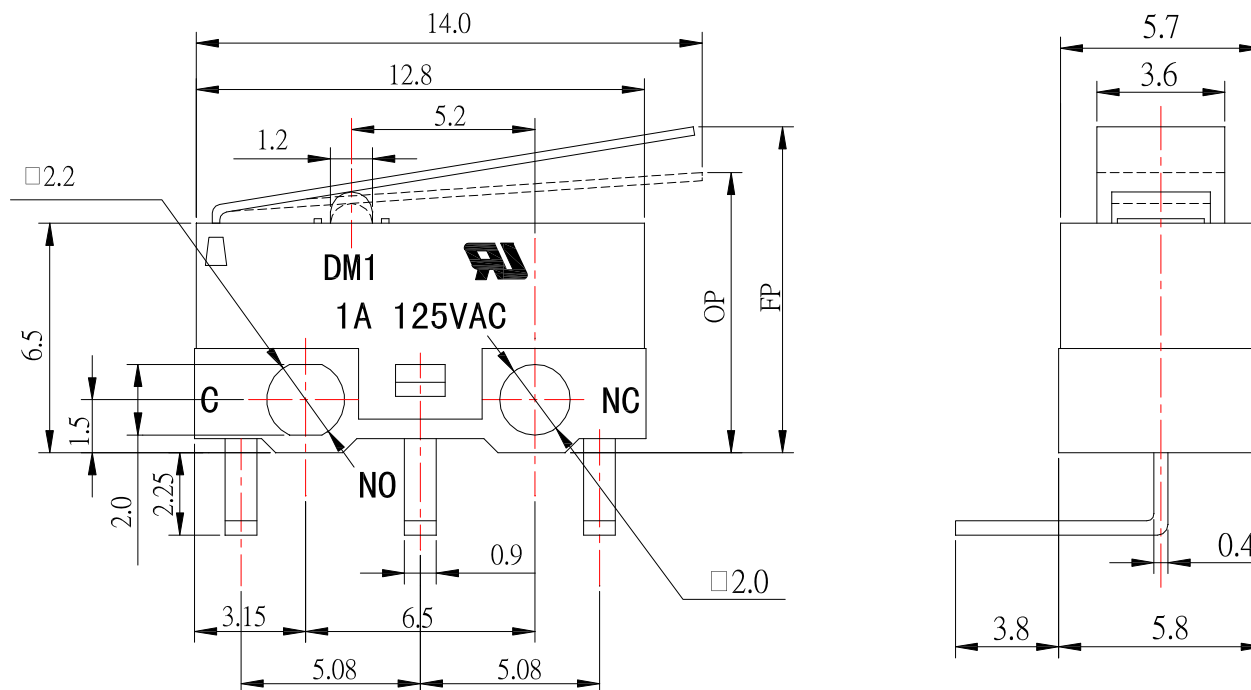

A diagram illustrating a 3D coordinate system. Three points are shown, each represented by a circle with a red dot. The first two points are on a horizontal line, with a distance of 5.08 between them. The third point is positioned such that the distance from the second point is 3.012, forming a right triangle with the horizontal line.

COM NO NO

1. 功能規格			
1.1 額定電壓		AC125V 1A/DC5V 30mA	1.5 自由位置 (FP) 10.4 ± 0.8mm
			1.6 動作位置 (OP) 8.8 ± 0.8mm
1.2 接觸電阻 (CR)	≤ 50mΩ (初始值)	1.7 行程 (PT)	
1.3 操作力 (OF)	30 ± 15gf	1.8 靈敏度 (BT)	
1.4 回彈力 (RF)			
2. 可靠度參數			
2.1 機械壽命	500,000 CYCLES	2.5 焊接方式	手工焊
2.2 電器壽命	10,000/500,000 CYCLES	2.6 適用溫度	-25° C ~ +65° C
2.3 絕緣電阻	≥ 100MΩ DC500V (初始值)	2.7 適用濕度	<85%RH
2.4 耐壓強度	AC500V 1 minute (初始值)		

[illegible]