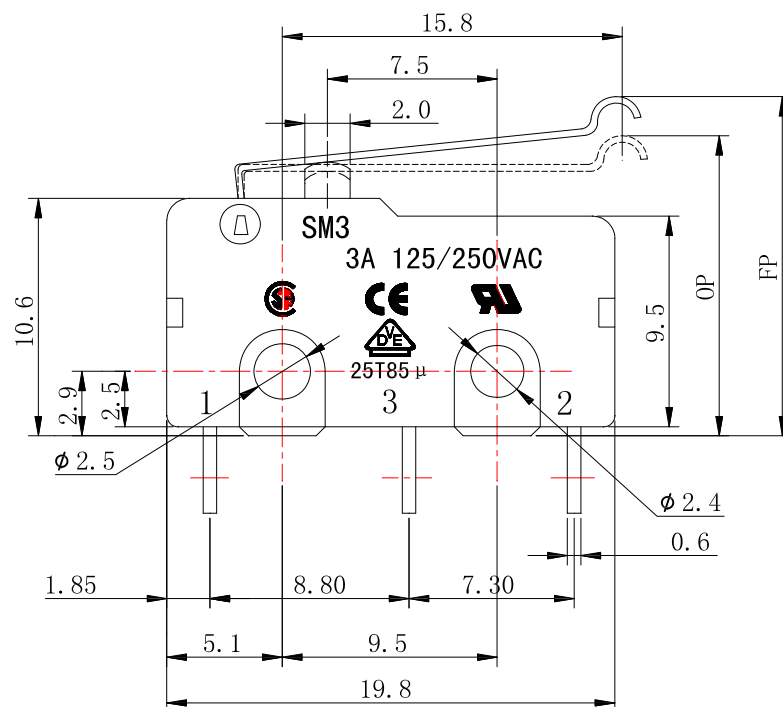


SCHEMATIC

1. Functional spec.	
1.1 Rated Voltage	125/250 VAC ; 3.0 A
1.2 Contact Resistance	$\leq 100\text{m}\Omega$ (Initial value)
1.3 Operating Force	$40 \pm 20\text{gf}$
1.4 Free Position	$16.7 \pm 0.8\text{ mm}$
1.5 Operating Position	$14.5 \pm 0.8\text{ mm}$
2. Reliable Rating	
2.1 Mechanical Life	1,000,000 CYCLES
2.2 Electrical Life	10,000 CYCLES
2.3 Insulation Resistance	$\geq 100\text{M}\Omega$ DC 500V (Initial value)
2.4 Withstand Voltage	AC 1,000V 1 minute (Initial value)
2.5 Operating Temper	-25 °C - +85 °C
2.6 Ambient Humidity Used	<85% RH

				CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3° 3RD. ANGEL'S  UNITS MM	DRAWN BY: Jack Lu	DATE 12/10/15	MAT'L		TITLE SWITCH										
					CHECKED BY: Jacky Chen	DATE 12/10/15	FINISH		MODLE MICRO SWITCH										
					APPROVED BY:	DATE	SCALE 1 : 1	DWG NO.	SM3-04N-40	SIZE A4									
1	更新Electrical Life	Jack	121015							VER R1									
ITEM NO.	DESCRIPTION	DRAWN	DATE			Tony Kao	12/10/15	SHEET NO.	1 of 1	PART NO.	SM3-04N-40								
	A	B		C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R