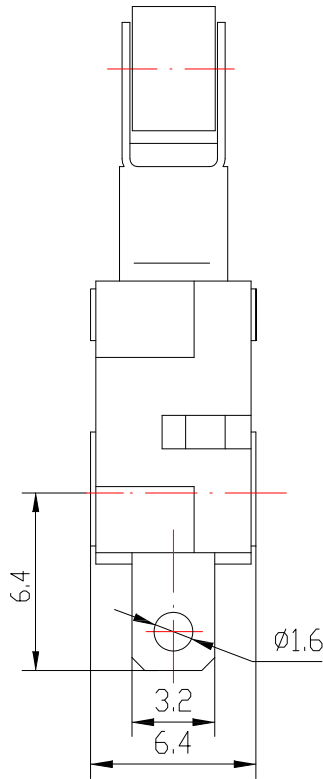
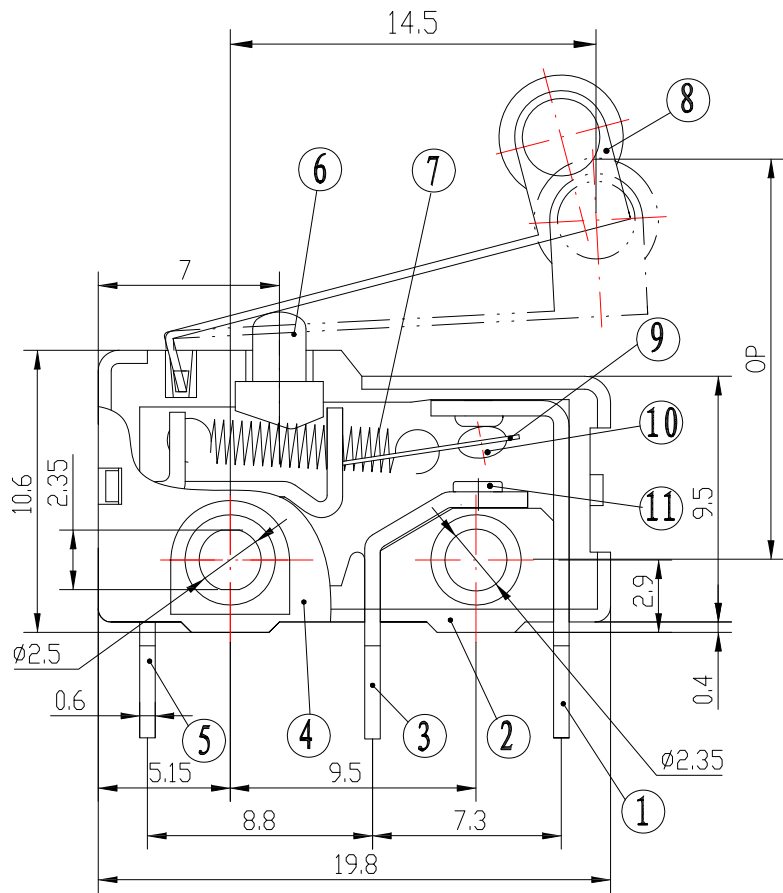


SCHEMATIC

1. SPECIFICATION.

RATINGS	5(2)A 125 / 250 V AC
TEMPERATURE	5GPA 125 / 250V AC 1 / 4 hp 250V AC
ELECTRONICAL LIFE	4A 30VDC 25T125 5E4 IP40 25T125 5E4 50~60Hz IP40
Insulation resistance	100 MΩ Min
Test voltage	AC 1000 / 1500V
Contact resistance	50 mΩ Max
Operating force	1.2 N Max
Release force	0.5 N Max
Operating position	15.2 ± 1.0mm

2. MATERIAL.

1	NC TERMINAL	Brass , Silver Plated
2	CASE	PBT (Black)
3	NO TERMINAL	Brass , Silver Plated
4	COVER	PBT (Black)
5	TERMINAL	Brass , Silver Plated
6	PLUNGER	PPS
7	PULL SPRING	SUS
8	MOVING ARM	SUS
9	MOVING PIECE	Tin-Brass
10	CONTACT	AgNi10
11	CONTACT	AgNi10