

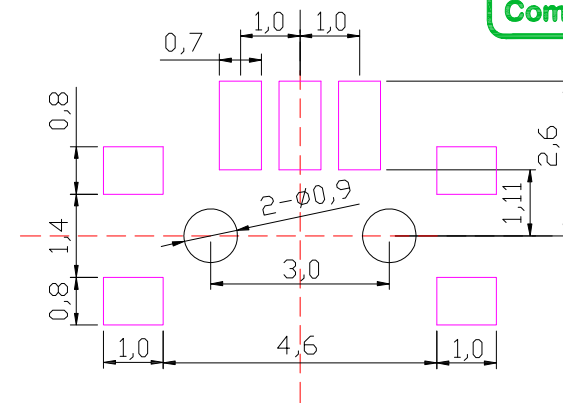
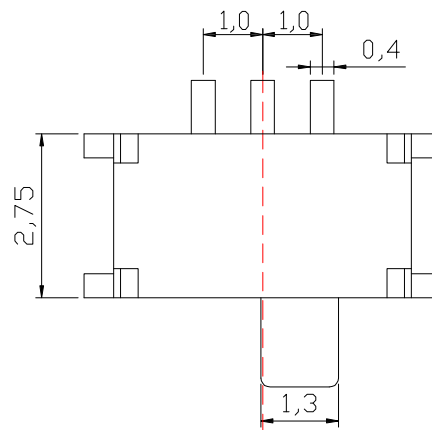


CIRCUIT DIAGRAM

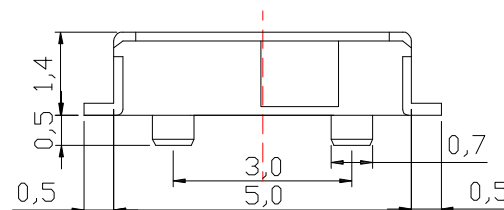

P.C.B LAND PATTERN

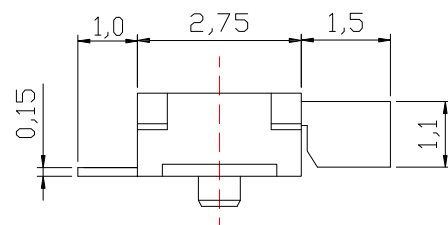

SPECIFICATIONS

Rating	50mA , 12V DC
Contact Resistance	70mΩ Max.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Insulation Resistance	100MΩ Min.
Operating Force	150 ± 50gf
Operating Life	10,000 cycles
Travel	1.0 ± 0.2mm

F	SPRING STRIP	1	SUS	
E	TERMINAL	1	PHOSPHOR BRONZE	Ag plated
D	CLIP	1	QBE2	Ag plated
C	COVER	1	PHOSPHOR BRONZE	Ag plated
B	BASE	1	NYLON	Black
A	SLIDER	1	NYLON	White
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

10/24/23

CHECKED BY:

Jacky Chen

DATE

10/24/23

APPROVED BY:

Tony Kao

DATE

10/24/23

MATL

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

SWITCH

SMT SLIDE SWICTH

SS-B92AP-W-S463

SS-B92AP-W-S463

SIZE

A4

VER

A1