


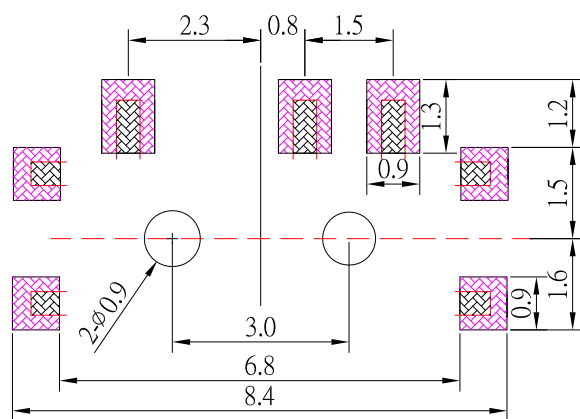



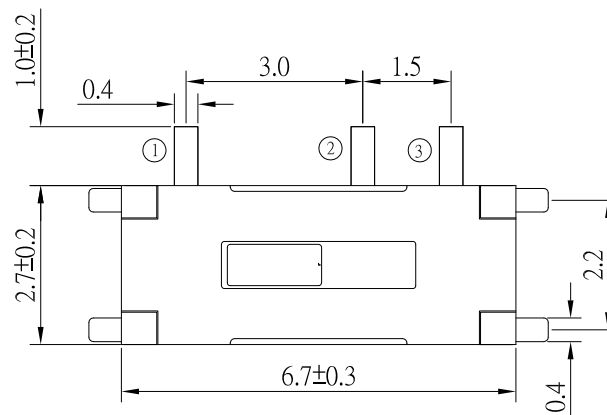

P.C.B LAND PATTERN

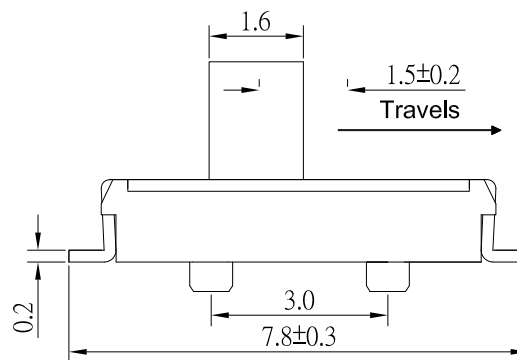

CIRCUIT DIAGRAM

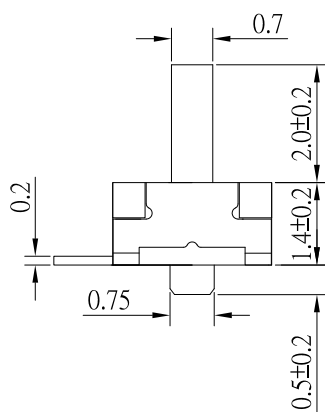

SPECIFICATIONS

Rating	0.3A 4V DC
Insulation Resistance	100M Ω Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100m Ω Max.
Operating Force	160 $\pm$ 50gf
Operating Life	10,000 cycles

F	CONTACT	1	PHOSPHOR BRONZE	Ag plated
E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated
D	CLIP	1	SUS	
C	COVER	1	BRASS	Ag plated
B	CASE	1	LCP(Black)	
A	SLIDER	1	PPA(White)	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

8	更新材質	Jack	012921
7	更新圖面	Jack	040919
6	更新材質	Jack	101217
5	更新材質	Jack	090817
4	更新Rating	Jack	080117
3	更新料號	Jack	091916
2	更新料號	Jack	070413
1	更新Rating	Jack	062813
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD. ANGEL'S UNITS MM

DRAWN BY:	DATE	MATL	TITLE	SWITCH
Jack Lu	01/29/21			
CHECKED BY:	DATE	FINISH	MODLE	SMT SLIDE SWICTH 平柄 柄寬:1.6*2.0
Jacky Chen	01/29/21			
APPROVED BY:	DATE	SCALE	DWG NO.	SS-B95A-W-S246
Tony Kao	01/29/21	1 : 1		
		SHEET NO.	PART NO.	SS-B95A-W-S246
		1 of 1		
				SIZE A4
				VER R8