



CIRCUIT DIAGRAM

P.C.B LAND PATTERN

MODEL NO.	SS-C90-S246	SS-C90A-S246	SS-C90B-S246	SS-C90C-S246
L (mm)	1.0	1.5	2.0	3.0
H (mm)	2.5	3.0	3.5	4.5

SPECIFICATIONS

Rating	0.3A 4V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	170 ± 50gf
Operating Life	10,000 cycles

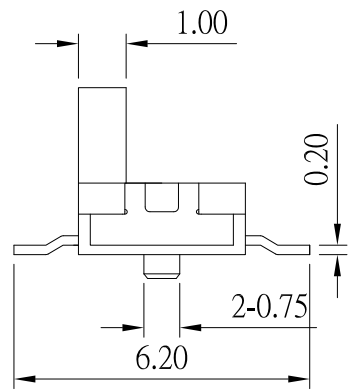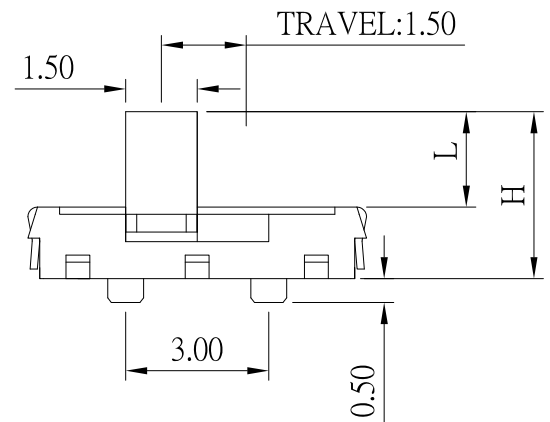

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
E	TERMINAL	6	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	PHOSPHOR BRONZE	Ag plated
C	COVER	1	SUS	
B	CASE	1	LCP	Black
A	SLIDER	1	PA46	Black

10	更新CLIP材質	Jack	082922
9	新增TRAVEL:1.50	Jack	060118
8	更新圖面	Jack	120914
7	更新CLIP材質	Jack	101514
6	更新Operating Force:150 ± 70gf	Jack	082214
5	更新材質	Jack	021414
4	新增高度選項"A"	Jack	021014
3	更新料號	Jack	112213
2	更新Rating及CIRCUIT DIAGRAM	Jack	062813
1	更新材質	Jack	060713
ITEM NO.	DESCRIPTION	DRAWN	DATE

**CONTACT** 建倚科技股份有限公司  
**CONTACT TECHNOLOGY CORP.**

TOLERANCE UNLESS OTHERWISE STATED: Up to 5 ±0.2, Above 5 ~ 15 ±0.3, Above 15 ~ 30 ±0.4, Above 30 ~ 50 ±0.5, Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	08/29/22			
CHECKED BY:	DATE	FINISH	MODLE	SLIDE SWITCH
Jacky Chen	08/29/22			
APPROVED BY:	DATE	SCALE	DWG NO.	SS-C90x-S246
Tony Kao	08/29/22	1 : 1		
		SHEET NO.	PART NO.	SS-C90x-S246
		1 of 1		
				SIZE A4
				VER R10