
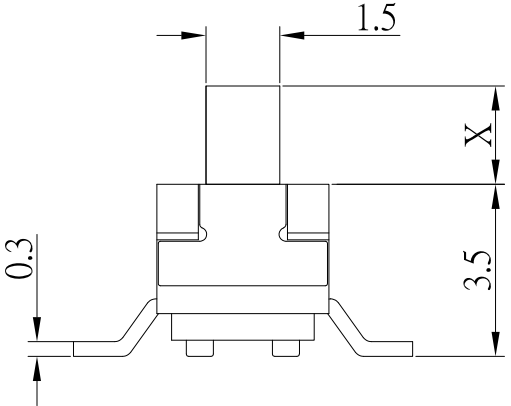
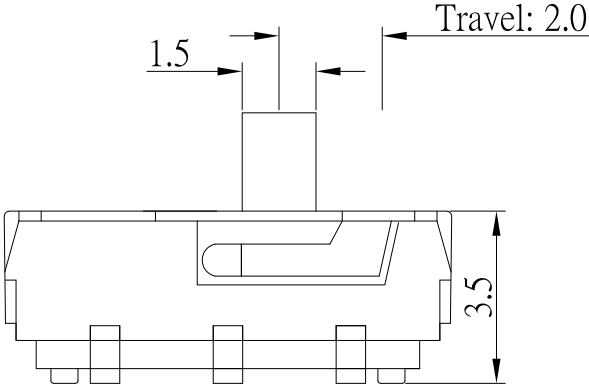
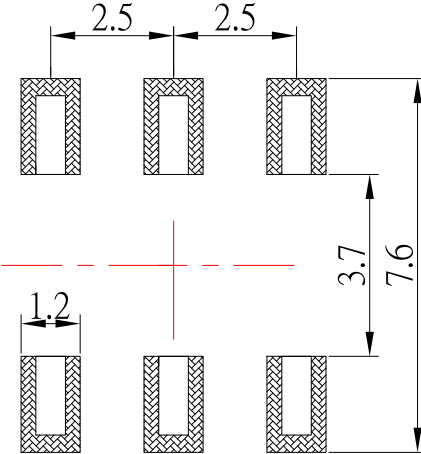


CIRCUIT DIAGRAM

NO	MODEL	KNOB(X)
1	SS-D35S	2.0 mm
2	SS-D35SA	3.0 mm
3	SS-D35SB	4.0 mm

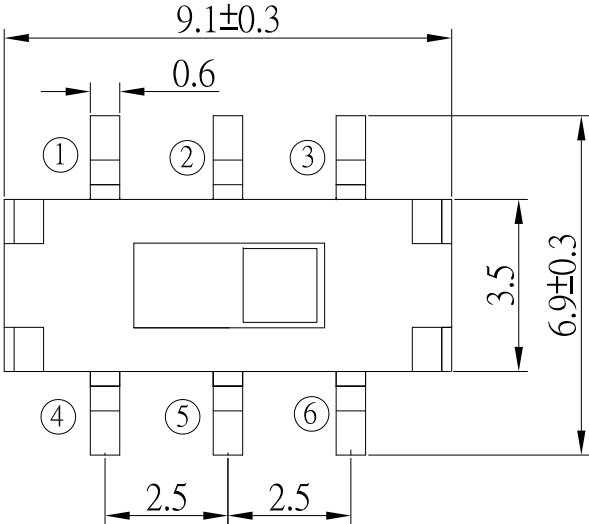

P.C.B LAND PATTERN

SPECIFICATIONS

Rating	0.3A 6V DC
Insulation Resistance	50M Ω Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100m Ω Max.
Operating Force	200 $\pm$ 50gf
Operating Life	10,000 cycles

E	TERMINAL	6	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	PHOSPHOR BRONZE	Ag plated
C	COVER	1	SUS	
B	CASE	1	PA6T	Black
A	SLIDER	1	PA46	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

11	更新CLIP材質	Jack	070124
10	更新撥柄位置	Jack	030921
ITEM NO.	DESCRIPTION	DRAWN	DATE



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	± 0.2
Above 5 ~ 30	± 0.3
Above 30 ~ 50	± 0.4
Above 50	± 0.5
Angle	$\pm 0.3^\circ$

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	07/01/24	FINISH	MODLE	SMT SLIDE SWICTH
CHECKED BY:	DATE	SCALE	DWG NO.	SS-D35Sx-B-S246
Jacky Chen	07/01/24	1 : 1	PART NO.	SS-D35Sx-B-S246
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	07/01/24			