
SS-D45Sx-x-S246

Model No.	X (mm)
SS-D45S	2.0
SS-D45SA	4.0


SLIDER COLOR :


Black : B
White : W

RoHS Compliant





CIRCUIT DIAGRAM

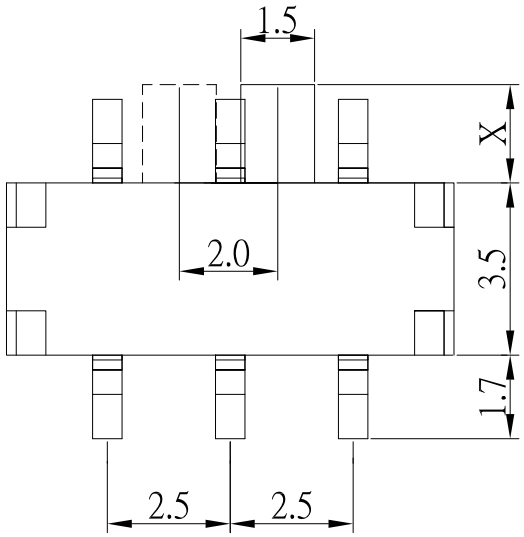

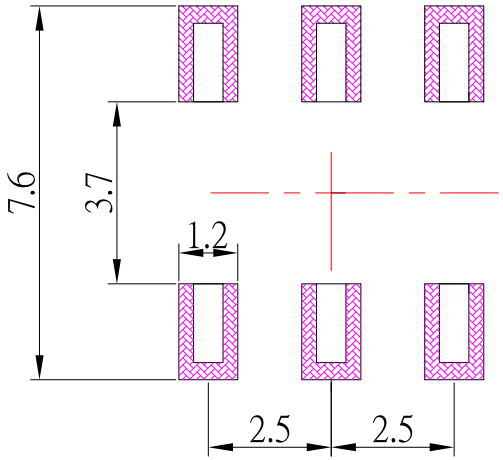

P.C.B LAND PATTERN

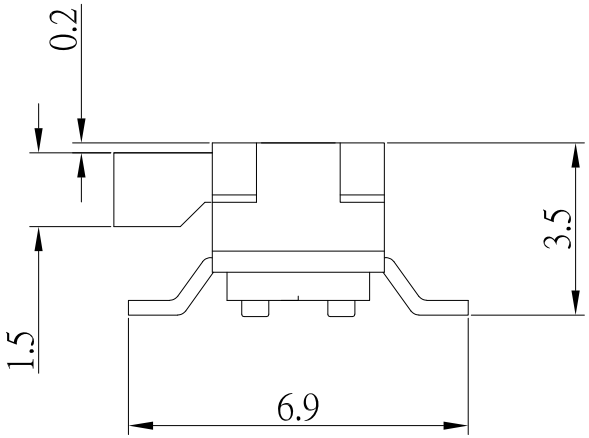

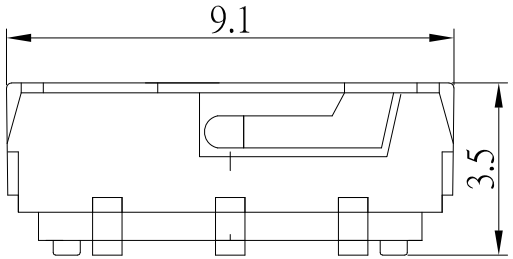

SPECIFICATIONS

Rating	0.3A 6V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	200 ± 50gf
Operating Life	10,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
E	TERMINAL	6	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	PHOSPHOR BRONZE	Ag plated
C	COVER	1	SUS	
B	CASE	1	PA6T	Black
A	SLIDER	1	PA46	

ITEM NO.	DESCRIPTION	DRAWN	DATE
5	更新CLIP材質	Jack	101226
4	更新為A0版	Jack	031517
3	新增顏色選項	Jack	031317
2	更新SPEC及材質	Jack	082114
1	更新圖面(刪除底部中間定位柱)	Jack	073113

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2; Above 5 ~ 15 ±0.3; Above 15 ~ 30 ±0.4; Above 30 ~ 50 ±0.5; Angle ±0.3

3RD. ANGEL'S | UNITS MM

DRAWN BY: Jack Lu	DATE 10/12/26	MAT'L	
CHECKED BY: Jacky Chen	DATE 10/12/26	FINISH	
APPROVED BY: Tony Kao	DATE 10/12/26	SCALE 1 : 1	SHEET NO. 1 of 1

TITLE	SWITCH		
MODLE	SMT SLIDE SWICTH		
DWG NO.	SS-D45Sx-x-S246	SIZE	A4
PART NO.	SS-D45Sx-x-S246	VER	R5