

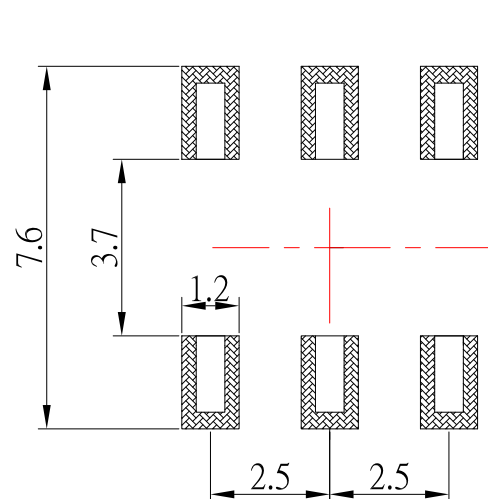




P.C.B LAND PATTERN

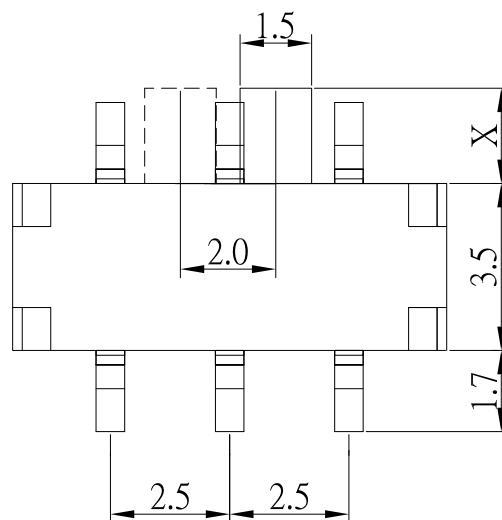

CIRCUIT DIAGRAM

SS-D45S_{x-x}-S246

Model No.	X (mm)
SS-D45S	2.0
SS-D45SA	4.0

SLIDER COLOR :

Black : B

White : W

SPECIFICATIONS

Rating	0.3A 6V DC
Insulation Resistance	50M Ω Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100m Ω Max.
Operating Force	200 $\pm$ 50gf
Operating Life	10,000 cycles

E	TERMINAL	6	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	BECU	Ag plated
C	COVER	1	SUS	
B	CASE	1	PA6T	Black
A	SLIDER	1	PA46	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

4	更新為A0版	Jack	031517
3	新增顏色選項	Jack	031317
2	更新SPEC及材質	Jack	082114
1	更新圖面(刪除底部中間定位柱)	Jack	073113
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 $\pm$ 0.2
Above 5 ~ 15 $\pm$ 0.3
Above 15 ~ 30 $\pm$ 0.4
Above 30 ~ 50 $\pm$ 0.5
Angle $\pm$ 0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	03/15/17
CHECKED BY:	DATE
Jacky Chen	03/15/17
APPROVED BY:	DATE
Tony Kao	03/15/17

MAT'L	TITLE	SWITCH
FINISH	MODLE	SMT SLIDE SWICTH
SCALE	DWG NO.	SS-D45S _{x-x} -S246
SHEET NO.	PART NO.	SS-D45S _{x-x} -S246
SIZE	A4	
VER	A0	