


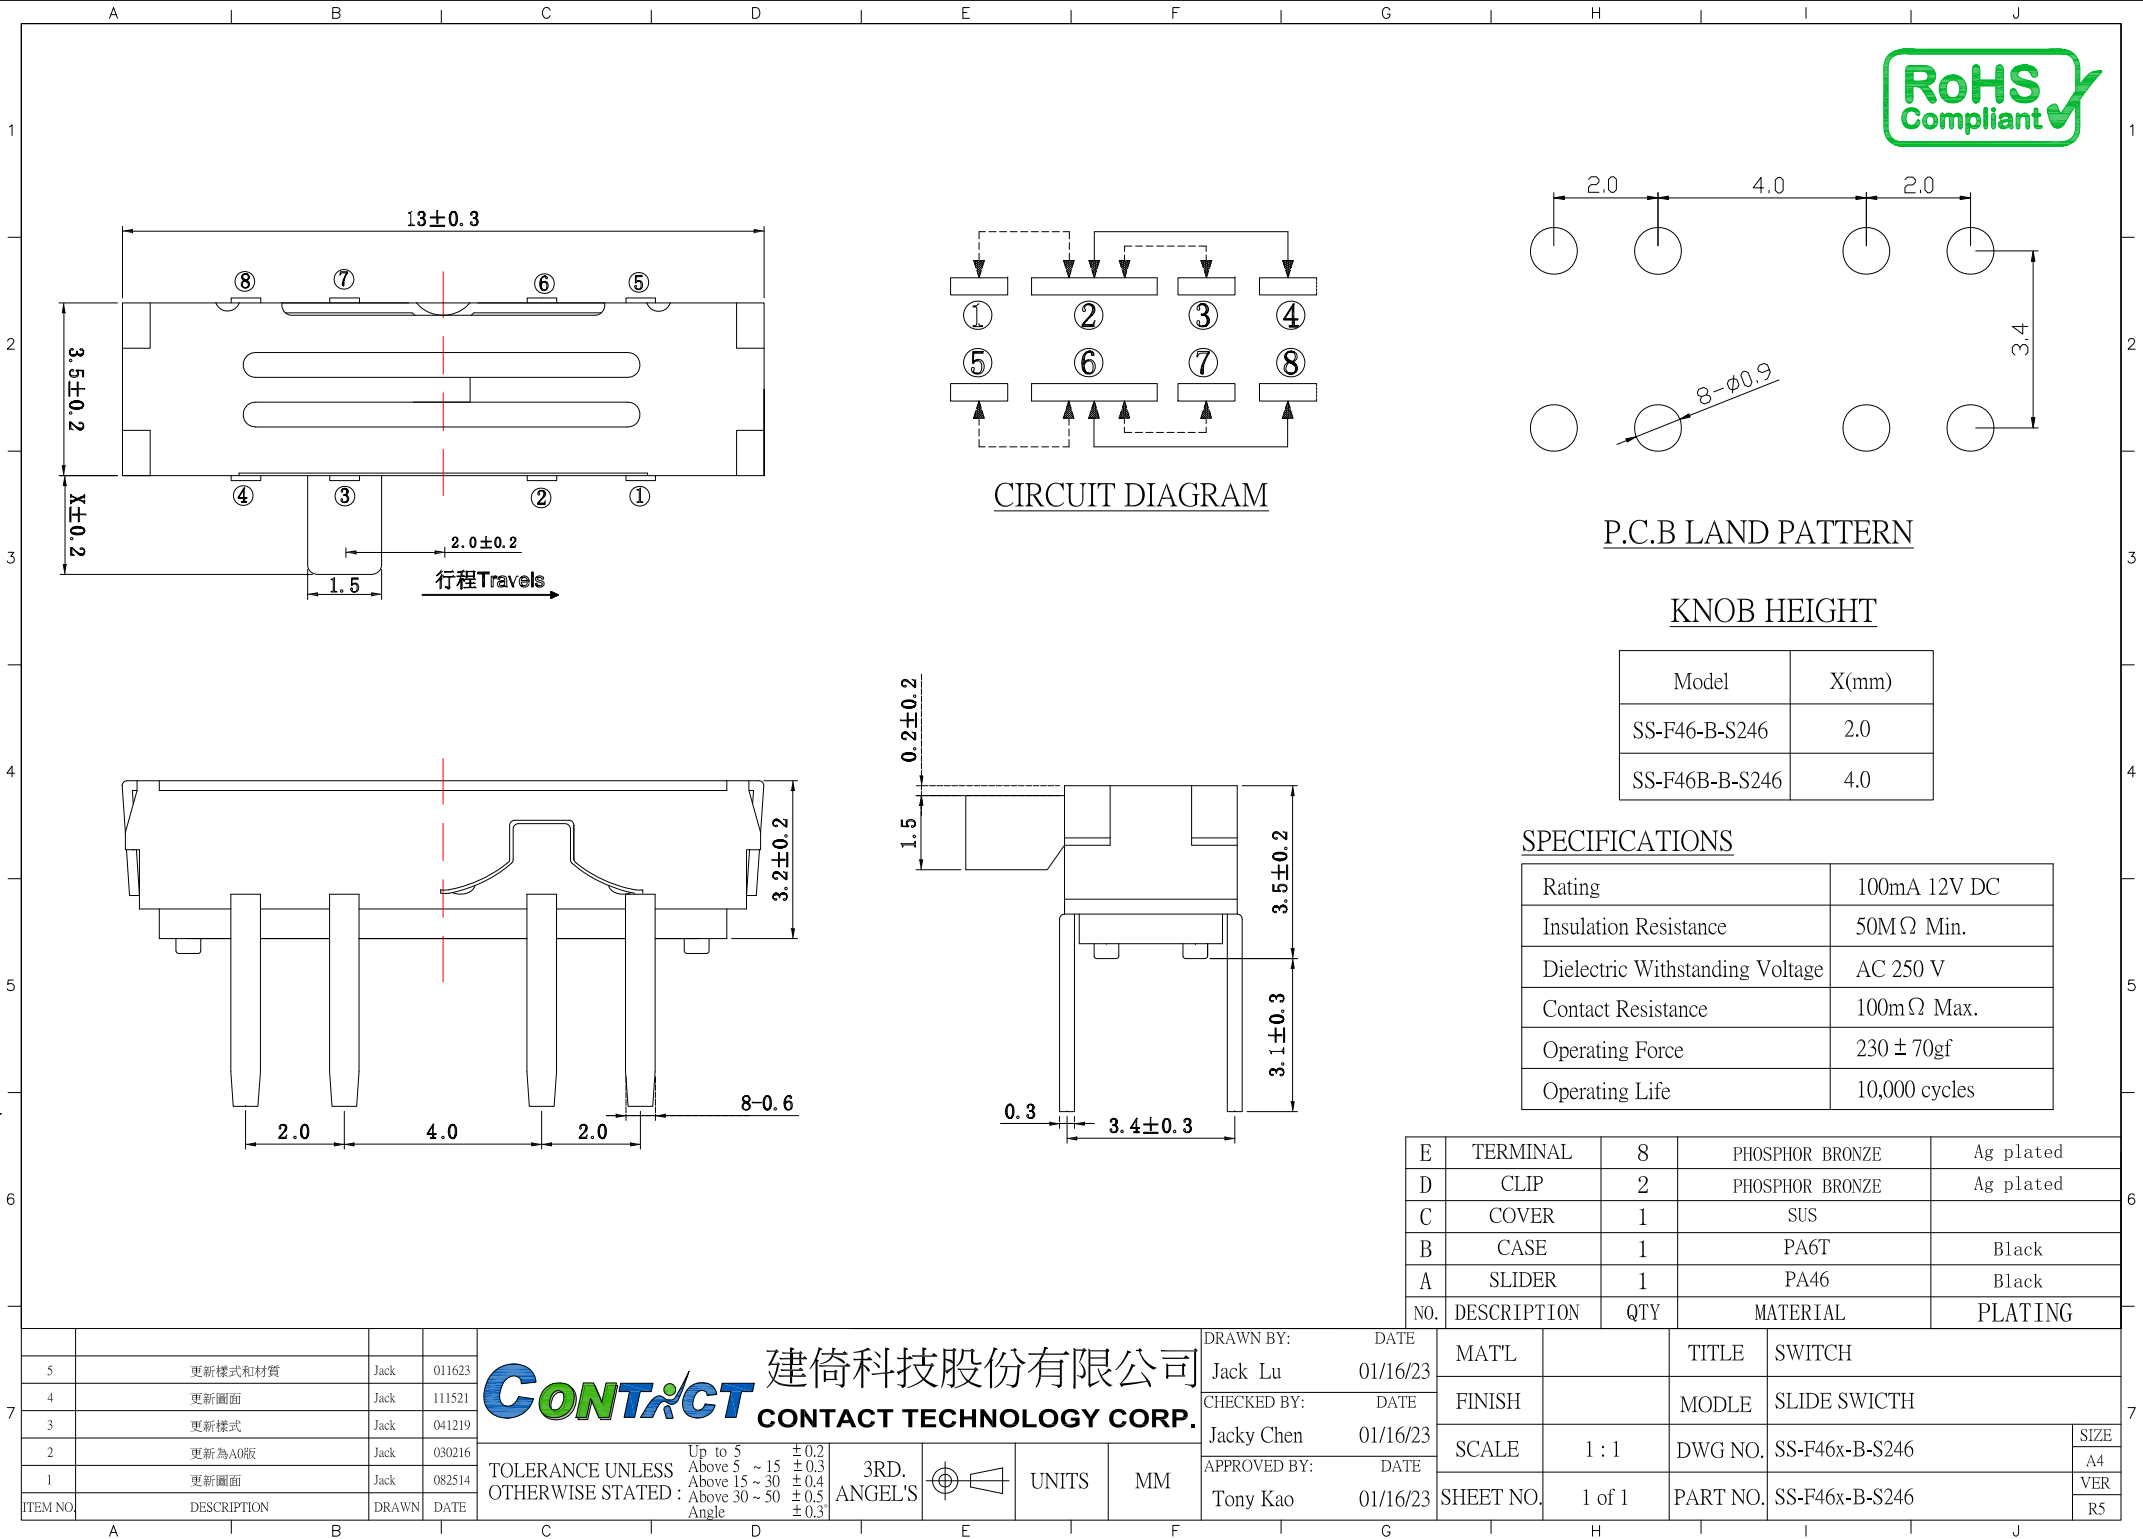

Rating	100mA 12V DC
Insulation Resistance	50M Ω Min.
Dielectric Withstanding Voltage	AC 250 V
Contact Resistance	100m Ω Max.
Operating Force	230 $\pm$ 70gf
Operating Life	10,000 cycles

E	TERMINAL	8	PHOSPHOR BRONZE		Ag plated
D	CLIP	2	PHOSPHOR BRONZE		Ag plated
C	COVER	1	SUS		
B	CASE	1	PA6T		Black
A	SLIDER	1	PA46		Black
NO.	DESCRIPTION	QTY	MATERIAL		PLATING
DATE 16/23	MAT'L		TITLE	SWITCH	
DATE 16/23	FINISH		MODLE	SLIDE SWICHTH	
DATE 16/23	SCALE	1 : 1	DWG NO.	SS-F46x-B-S246	SIZ A4
DATE 16/23	SHEET NO.	1 of 1	PART NO.	SS-F46x-B-S246	VER RS