

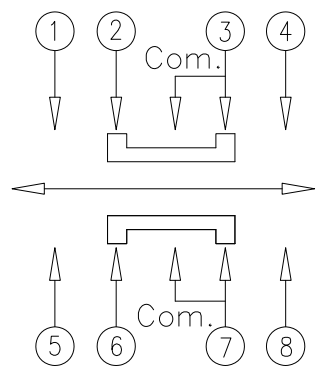


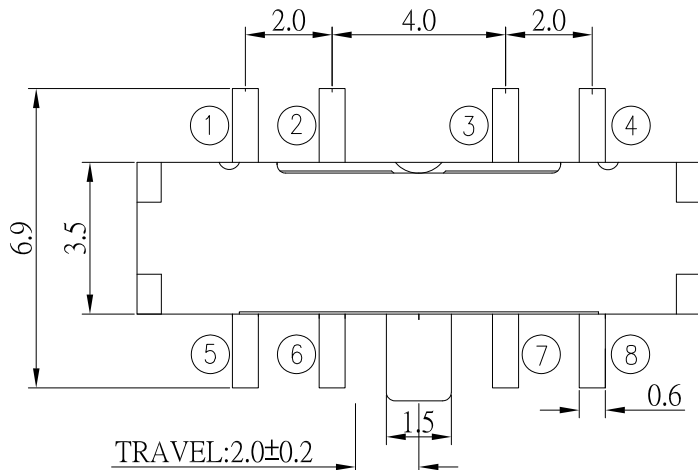

CIRCUIT DIAGRAM

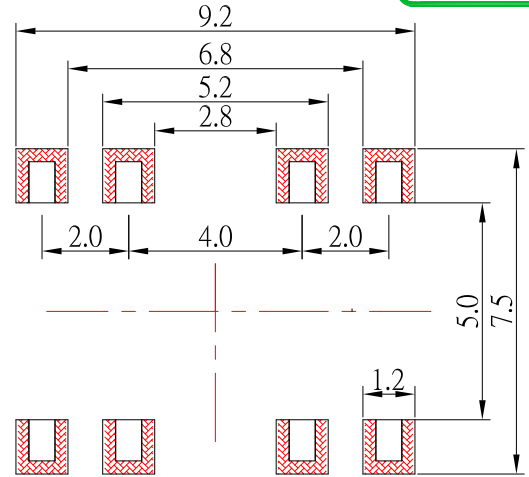

P.C.B LAND PATTERN



SS-F46S_x-x-S246

MODEL NO.	Knob(X)
SS-F46S	2.0 mm
SS-F46SA	4.0 mm

SLIDER COLOR :
Black : B
White : Blank

SPECIFICATIONS

Rating	0.3A 6V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	200 ± 50gf
Operating Life	10,000 cycles

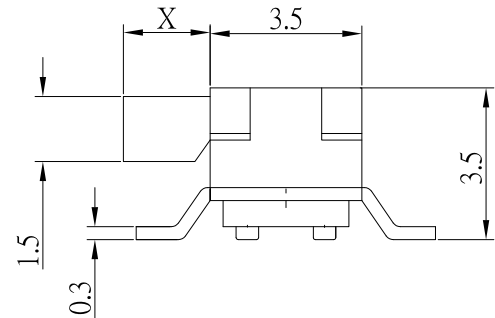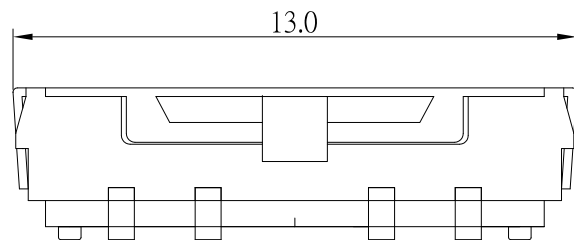

E	TERMINAL	8	PHOSPHOR BRONZE	Ag plated
D	CLIP	1	BEcu	Ag plated
C	COVER	1	SUS	
B	CASE	1	LCP	Black
A	SLIDER	1	PA46	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	--------------	-------	----

DRAWN BY:	DATE
Jack Lu	04/26/19
CHECKED BY:	DATE
Jacky Chen	04/26/19
APPROVED BY:	DATE
Tony Kao	04/26/19

MAT'L	TITLE	SWITCH
FINISH	MODLE	SLIDE SWICTH
SCALE	1 : 1	DWG NO. SS-F46S _x -x-S246
SHEET NO.	1 of 1	PART NO. SS-F46S _x -x-S246

ITEM NO	DESCRIPTION	DRAWN	DATE
3	新增TRAVEL	Jack	042619
2	新增高度選項及更新料號	Jack	021916
1	更新圖面	Jack	082514