


P.C.B LAYOUT MOUNTING PATTERN

SCHEMATIC (NON-SHORTING)

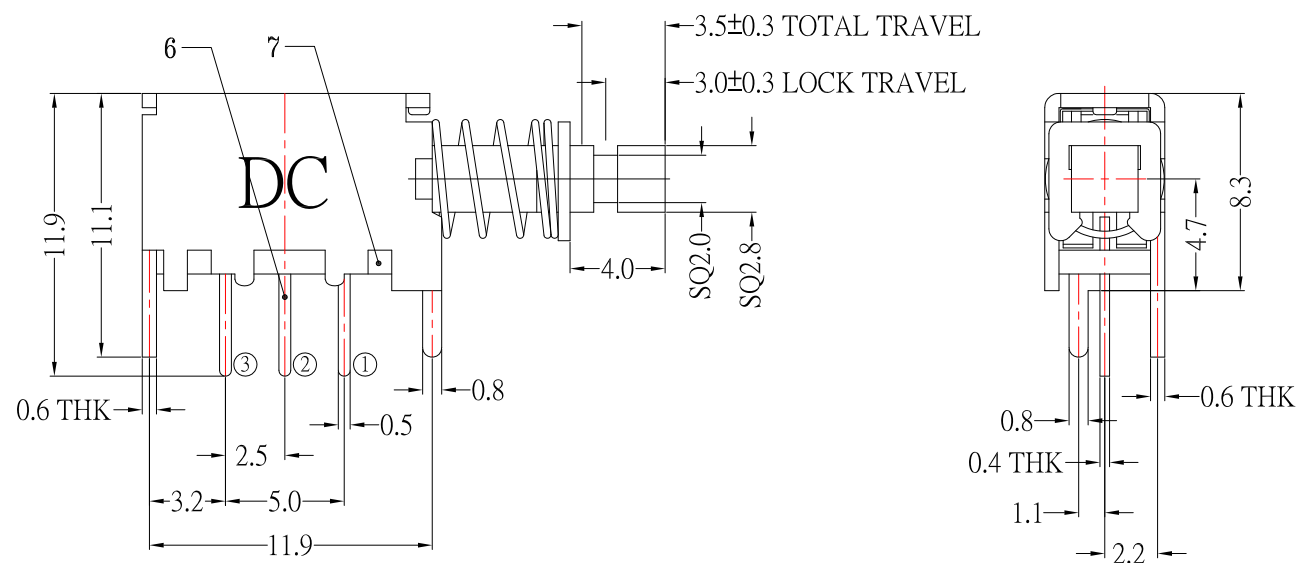

SPECIFICATIONS

- 1.Rating : DC50V 0.3A
- 2.Circuit : 1P2T
- 3.Timing : Non-Shorting
- 4.Operating force : 250 ± 100 gf
- 5.Life test : 10,000 cycles
- 6.Operating Mode : Self-Lock

9	Contact Clip	1	Phosphor Bronze	Ag-Plating
8	Spring Plate	1	PBS	Natural
7	Base	1	Phenolic Resin	Natural
6	Terminal	1	Brass	Ag-Plating
5	Knob	1	PA66	Blue
4	Block	1	Stainless Steel	Ni-Plating
3	Spring	1	Steel Wire	Ni-Plating
2	Cam Strick	1	PBS Wire	Natural
1	Frame	1	Spcc	Ni-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

6	標示pin編號	Jack	063015
5	更新P.C.B LAYOUT	Jack	061515
4	更新材質	Jack	052915
3	新增SPEC	Jack	052515
2	新增Operating Mode	Jack	072514
1	新增"DC"圖樣	Jack	081513
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD. ANGEL'S

UNITS MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 06/30/15
DATE: 06/30/15
DATE: 06/30/15

MAT'L		TITLE	SWITCH
FINISH		MODLE	PUSH SWITCH 藍柄 自鎖式
SCALE	1 : 1	DWG NO.	PS-12E05-S191
SHEET NO.	1 of 1	PART NO.	PS-12E05-S191
		SIZE	A4
		VER	R6