
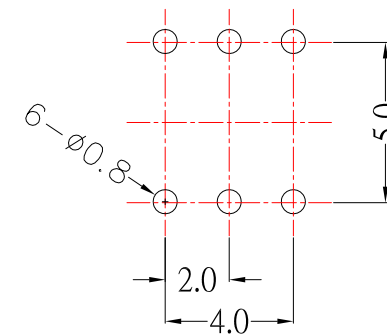
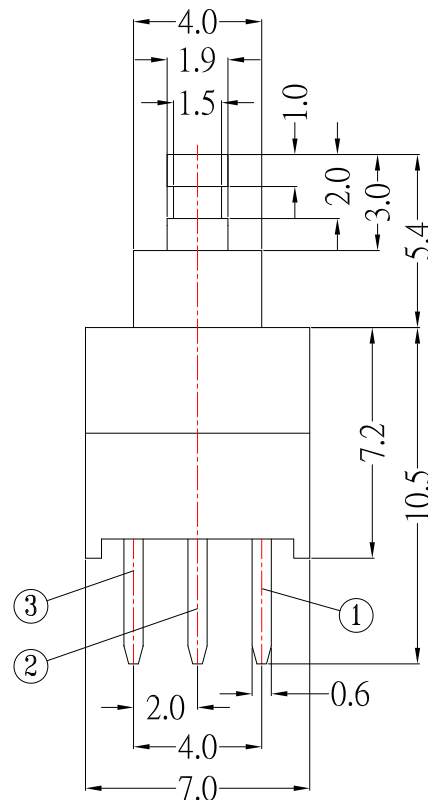


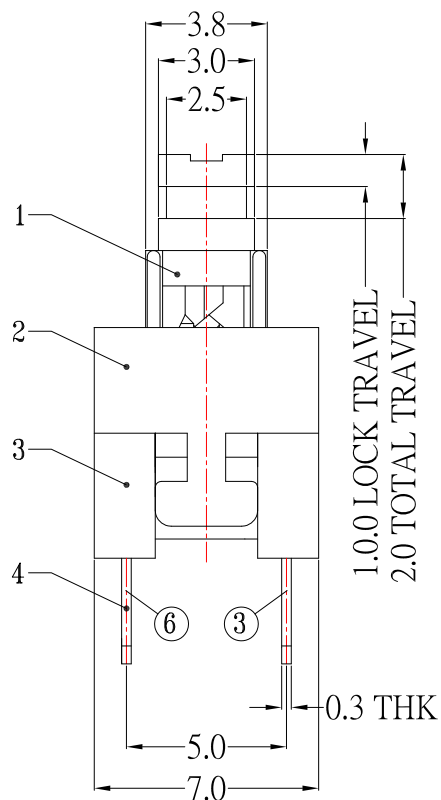


P.C.B MOUNTING PATTERN

SPECIFICATIONS

NOTE:

1. PS-D12L-S191: SELF-LOCK
2. PS-D12NL-S191:NON-LOCK
- 3.Timing : Non-Shorting
- 4.Operating force : 250 ± 100 gf
- 5.Life test : 10,000 cycles



SCHEMATIC

6	CONTACT(CLIP)	2	PHOSPHOR BRONZE	Ag-Plated
5	SPRING	1	SUS	
4	TERMINAL	6	BRASS	Ag-Plated
3	CASE	1	PBT	BLACK
2	COVER	1	POM	WHITE
1	KNOB	1	POM	BLUE
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	04/13/22			
CHECKED BY:	DATE	FINISH	MODLE	PUSH SWITCH
Jacky Chen	04/13/22			
APPROVED BY:	DATE	SCALE	DWG NO.	PS-D12x-S191
Tony Kao	04/13/22	1 : 1		
		SHEET NO.	PART NO.	PS-D12x-S191
		1 of 1		
				SIZE A4
				VER R5