




P.C.B LAYOUT
BOTTOM VIEW

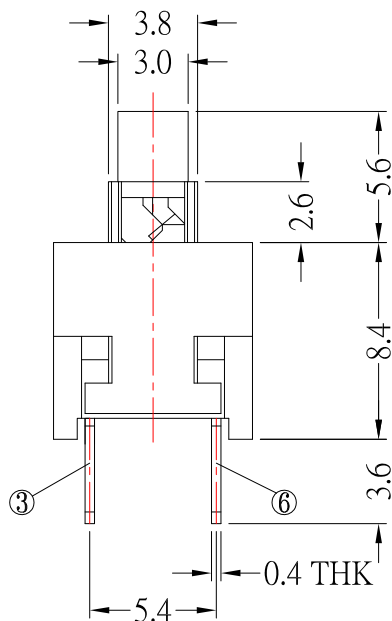

SCHEMATIC (NON-SHORTING)

2.5 FULL STROKE

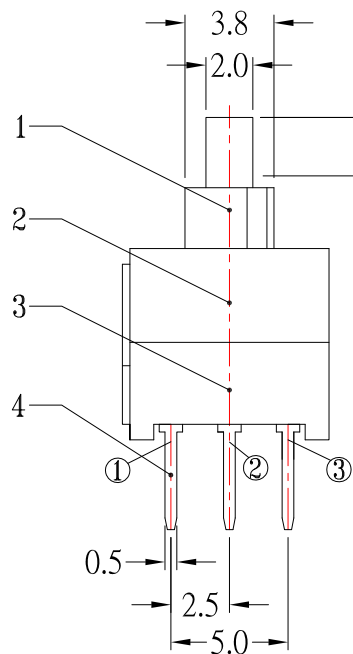

SPECIFICATIONS

Rating	30 V DC , 0.1 A
Circuit	2P-2T
Contact Resistance	200 mΩ MAX .
Timing	Non-Shorting
Operating Mode (X)	L: Self-Lock/N: Non-Lock
Stroke	Full: 2.5mm, Lock: 1.5mm
Operating Force	250±100gf
Operating Life	10,000 CYCLES

7	CAM STICK	SUS	1	NATURAL
6	CONTACT CLIP	PHOSPHOR BRONZE	2	Ag PLATED
5	SPRING	SUS	1	NATURAL
4	TERMINAL	BRASS	6	Ag PLATED
3	CASE	PBT	1	BLACK
2	COVER	POM	1	GREY
1	KNOB	POM	1	BLACK
NO.	PARTS	MATERIALS	Q'TY	FINISH

4	更新Contact Resistance	Jack	010615
3	更新Operating Mode: NL改N	Jack	040914
2	更新圖面及SPEC和材質	Jack	010714
1	新增pin標號	Jack	083013
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	01/06/15	FINISH	MODLE	PUSH SWITCH
CHECKED BY:	DATE	SCALE	DWG NO.	PS-D14x-S191
Jacky Chen	01/06/15	1 : 1	PART NO.	PS-D14x-S191
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	01/06/15			