




SCHEMATIC (NON-SHORTING)

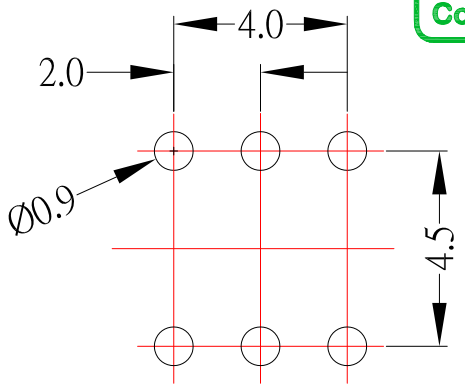

P.C.B LAYOUT MOUNTING PATTERN

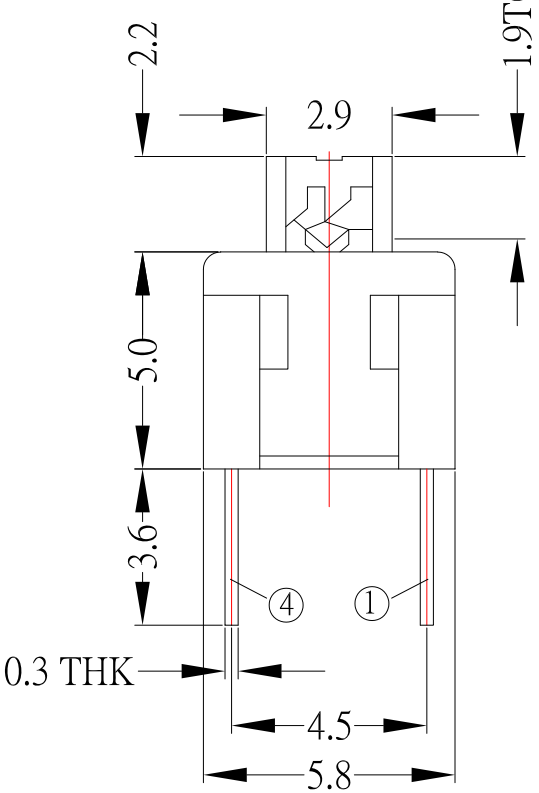

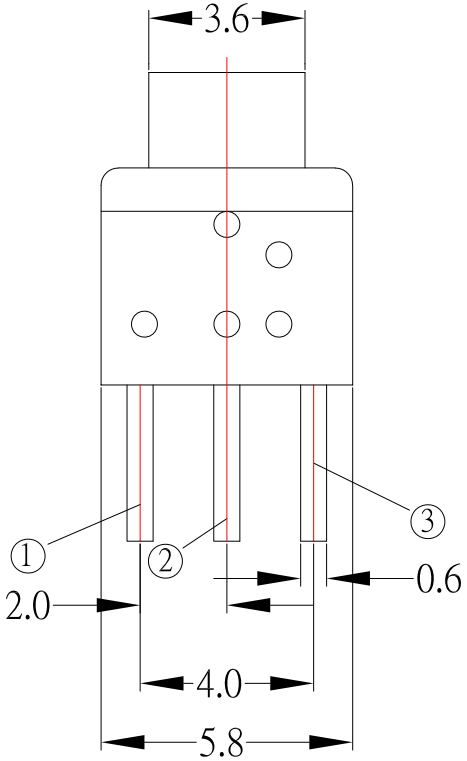

SPECIFICATIONS

Rating	30V DC / 0.1A
Circuit	2C-2P
Contact Resistance	200 mΩ MAX .
Timing	NON-SHORTING
Operating Mode	SELF-LOCK : PS-D16FL-S191 NON-LOCK : PS-D16FN-S191
Stroke	Full : 1.9mm , Lock : 1.0mm
Operating Force	SELF-LOCK :150 gf ±80
	NON-LOCK 250 gf ±80
Operating Life	10,000 CYCLES

ITEM NO.	DESCRIPTION	DRAWN	DATE
4	新增PCB LAYOUT尺寸	Jack	082626
3	更新為A0版	Jack	042016
2	更新Contact Resistance	Jack	010615
1	Rating Update	FrankWu	030212

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2; Above 5 ~ 15 ±0.3; Above 15 ~ 30 ±0.4; Above 30 ~ 50 ±0.5; Angle ±0.3°

3RD. ANGEL'S | UNITS MM

		DATE
DRAWN BY:	Jack Lu	08/26/26
CHECKED BY:	Jacky Chen	08/26/26
APPROVED BY:	Tony Kao	08/26/26

MAT'L		TITLE	SWITCH
FINISH		MODLE	PUSH SWITCH
SCALE	1 : 1	DWG NO.	PS-D16Fx-S191
SHEET NO.	1 of 1	PART NO.	PS-D16Fx-S191

SIZE A4 | VER R4