

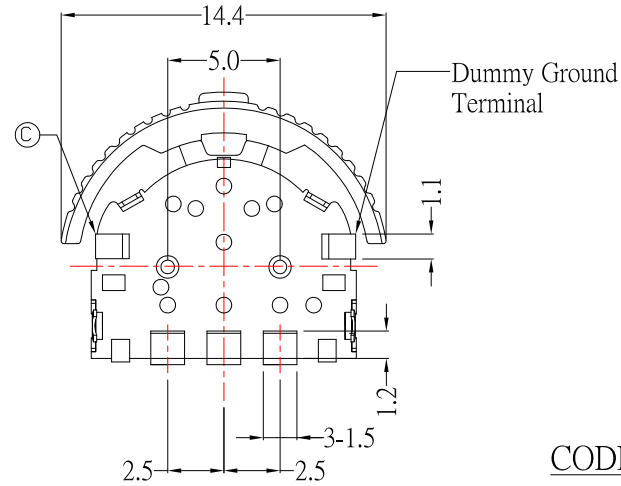
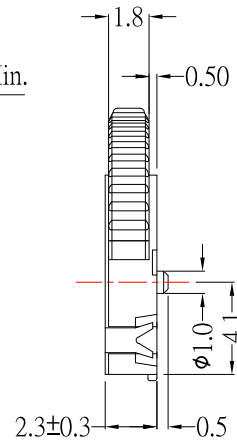


DIMENSIONS



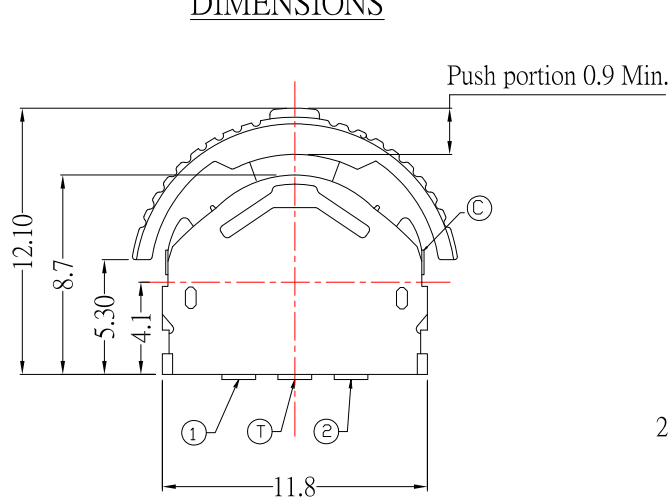


PRODUCT IMAGE

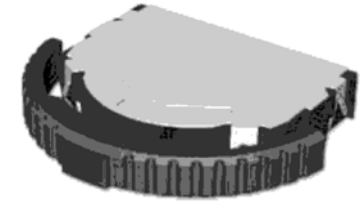



CODE TABLE

Code Table ( = ON)


Terminal	Angle				
	(20°)	(18°)	0°	(18°)	(25°)
①					
②					
C					

CCW ← → CW

P.C.B LAYOUT MOUNTING PATTERN

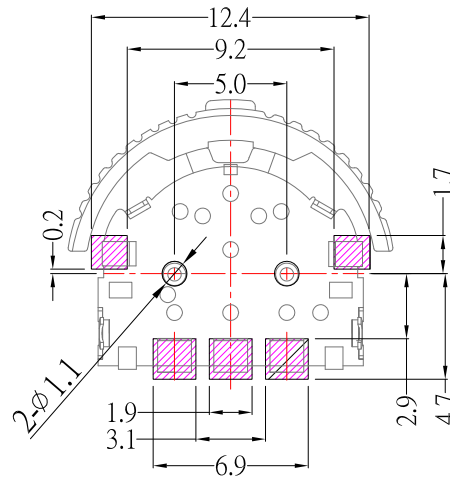

CIRCUIT DIAGRAM



SPECIFICATIONS

Rating	DC 5V 10mA
Output Voltage	1V Min, at 5V 1mA
Travel	Lever 70 ± 50 gf
Operating Force	Push 200 ± 100 gf
Operating Life (cycles)	100,000

5	更新樣式	Jack	110922
4	新增尺寸公差	Jack	100119
3	更新尺寸及變更為A0版	Jack	062215
2	新增尺寸	Jack	061515
1	Drawing update	FrankWu	061112
ITEM NO.	DESCRIPTION	DRAWN	DATE

**建倚科技股份有限公司**
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S		UNITS	MM
--------------	--	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	11/09/22			
CHECKED BY:	DATE	FINISH	MODLE	LEVER SWITCH
Jacky Chen	11/09/22			
APPROVED BY:	DATE	SCALE	DWG NO.	K01B-S126
Tony Kao	11/09/22	1 : 1		
		SHEET NO.	PART NO.	K01B-S126
		1 of 1		

SIZE	A4
VER	R5