
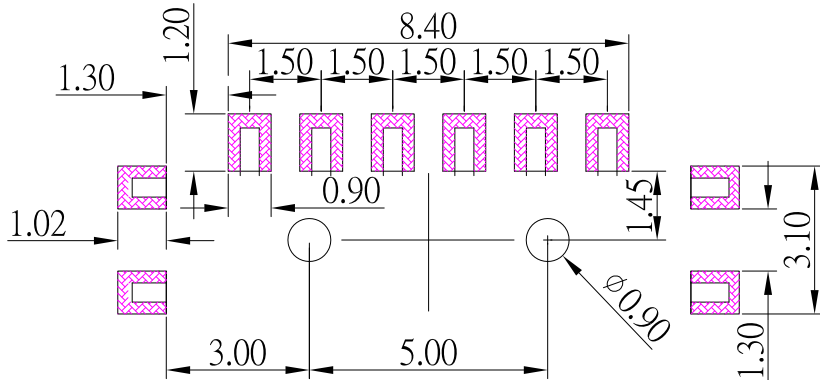



CIRCUIT DIAGRAM

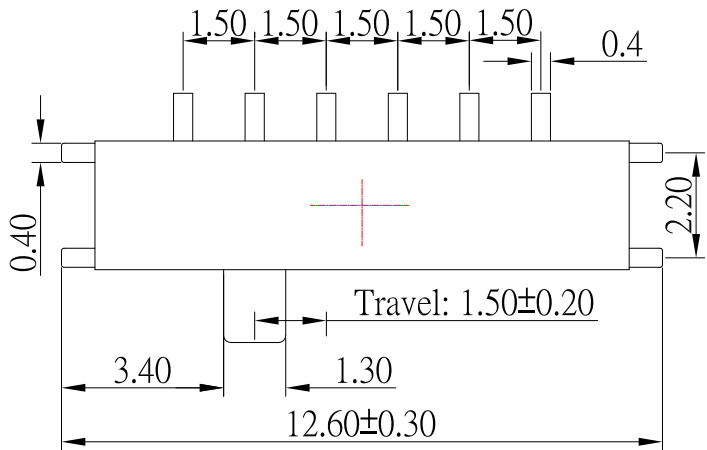

P.C.B LAND PATTERN

SPECIFICATIONS

Rating	0.1A 12V DC
Insulation Resistance	50M Ω Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100m Ω Max.
Operating Force	200 $\pm$ 70gf
Operating Life	10,000 cycles

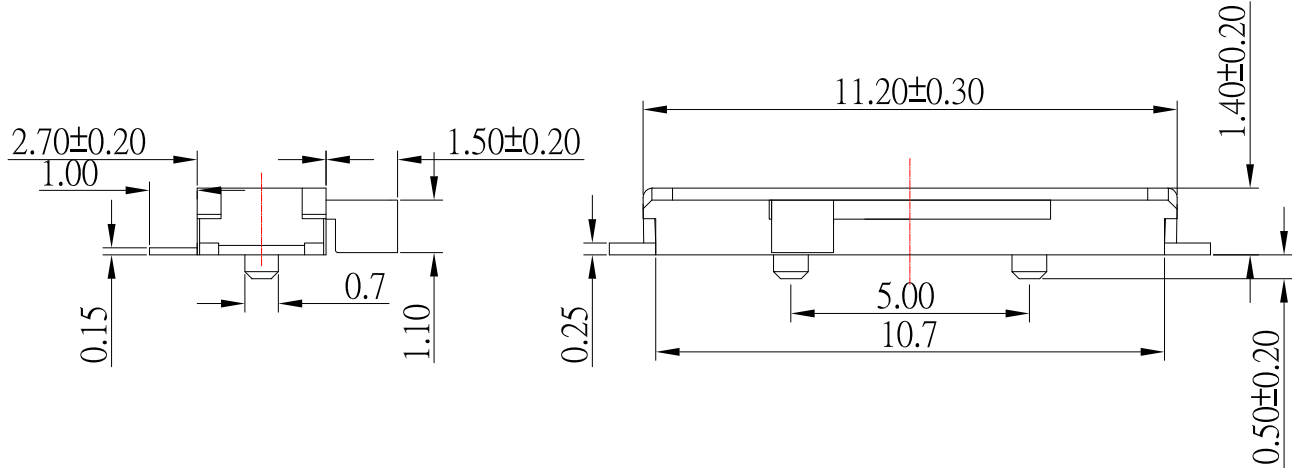

F	SPRING	1	SUS	
E	TERMINAL	10	PHOSPHOR BRONZE	Ag plated
D	CLIP	1	BECU	Ag plated
C	COVER	1	PHOSPHOR BRONZE	Ag plated
B	CASE	1	LCP	Black
A	SLIDER	1	PA46	Black, White
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

5	更新CIRCUIT DIAGRAM和尺寸公差和Operating Force	Jack	110223
4	新增PCB LAYOUT尺寸	Jack	022017
3	新增PCB LAYOUT尺寸	Jack	021317
2	更新材質及更新為AO版	Jack	020416
1	新增travel位置	Jack	121115
ITEM NO.	DESCRIPTION	DRAWN	DATE



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
Above 30 ~ 50	± 0.5
Angle	± 0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	11/02/23			
CHECKED BY:	DATE	FINISH	MODLE	SLIDE SWITCH
Jacky Chen	11/02/23			
APPROVED BY:	DATE	SCALE	DWG NO.	SS-K02G-S246
Tony Kao	11/02/23	1 : 1		
		SHEET NO.	PART NO.	SS-K02G-S246
		1 of 1		
				SIZE A4
				VER R5