


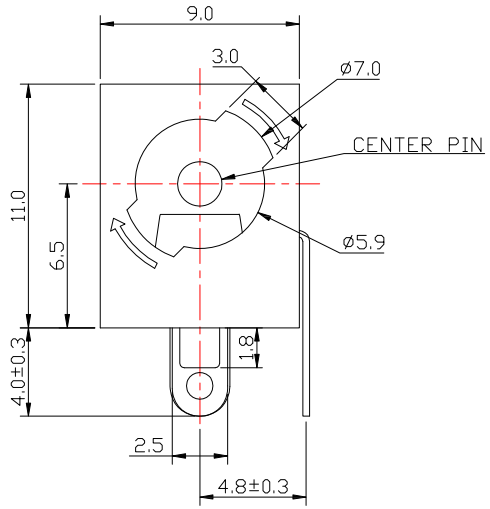


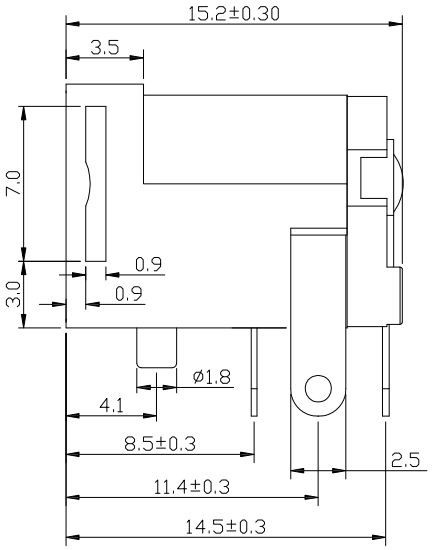


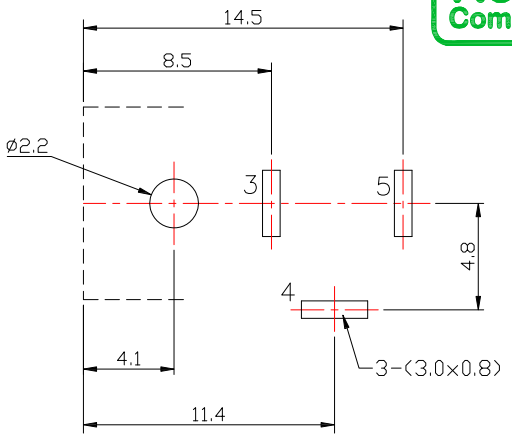

P.C.B LAYOUT
TOP VIEW

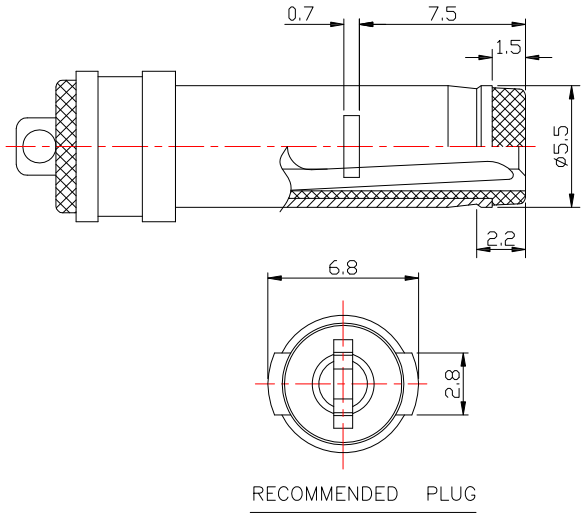

RECOMMENDED PLUG

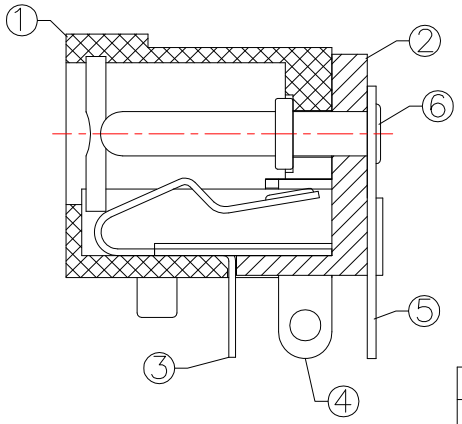

MODEL NO.	DC-062-4-x
SCHEMATIC	5(6) / 4 / 3
CENTER PIN	ø2.0mm
	ø2.5mm

SPECIFICATION

1.Rating ：DC 30V , 3.0A
2.Contact resistance：≤30mΩ
3.Insulation resistance：≥100MΩ
4.Withstand voltage：500VAC
5.Insertion and extraction force：3-30N
6.life test：5,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
⑥	PIN	1	BRASS	Ni-Plating
⑤	FLAT FOOT	1	BRASS	Sn-Plating
④	CURVE PIECE	1	BRASS	Sn-Plating
③	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
②	COVER	1	PBT	
①	HOUSING	1	PBT	

ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2; Above 5 ~ 15 ±0.3; Above 15 ~ 30 ±0.4; Above 30 ~ 50 ±0.5; Angle ±0.3°

3RD. ANGEL'S | UNITS MM

DRAWN BY: Jack Lu	DATE 06/01/21	MAT'L		TITLE	JACK
CHECKED BY: Jacky Chen	DATE 06/01/21	FINISH		MODLE	DC JACK 帶鎖
APPROVED BY: Tony Kao	DATE 06/01/21	SCALE	1 : 1	DWG NO.	DC-062-4-x-S124
		SHEET NO.	1 of 1	PART NO.	DC-062-4-x-S124

SIZE A4 | VER R