









MRUSB-5B-RV6x-S331

SHELL鍍層:

TN

NI

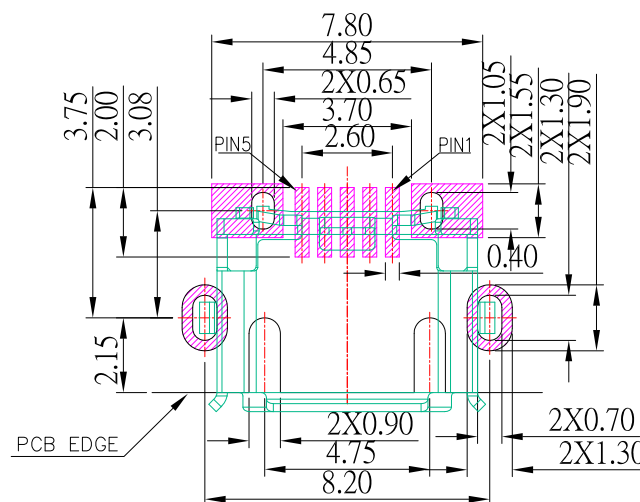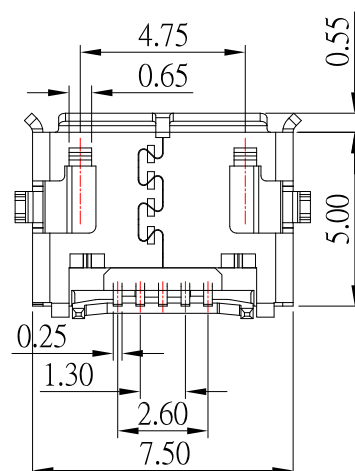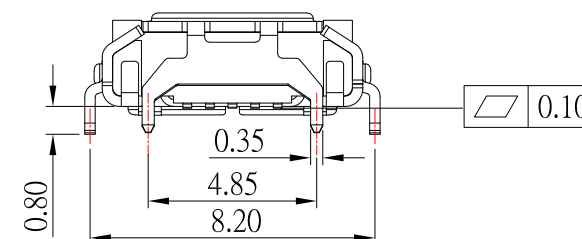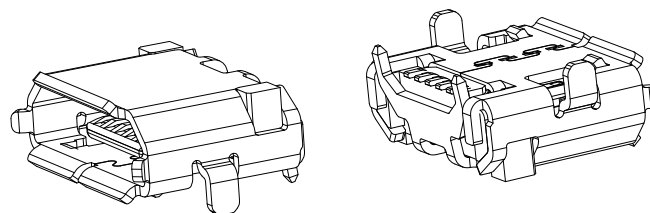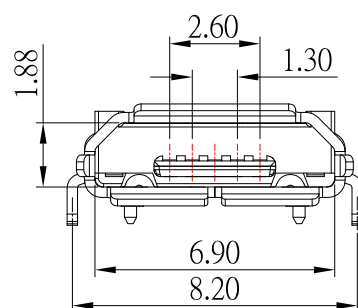

P.C.B LAYOUT MOUNTING PATTERN

NOTES:

MATERIAL:

1.1 HOUSING: LCP,Black

1.2 CONTACT: BRASS

1.3 SHELL: SUS

Finish:

2.1 Contact: Plated Gold in Mating Area ;

Gold Plated on Solder Balls

Nickel under plated overall

2.2 Shell: Tin under Plated surface layer

3.SPECIFICATION:

3.1 RATING: 30V AC , 0.5 A(2,3,4 pin) ; 1.8 A(1,5 pin)

3.2 DIELECTRIC WITHSTANDING VOLTAGE: 250 VAC

3.3 CONTACT RESISTANCE: 30 mΩ MAX.

3.4 INSULATION RESISTANCE: 100 MΩ MIN.

3.5 TEMPERATURE RANGE: -30°C ~ +85°C



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 02/25/19
DATE: 02/25/19
DATE: 02/25/19

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

CONNECTOR
MICRO USB 反向 外殼4 腳插板
(PH8.2-4.85mm)
MRUSB-5B-RV6x-S331
MRUSB-5B-RV6x-S331

SIZE
A4
VER
R

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	新增SHELL鍍層選項及更新pcb layout	Jack	022519