

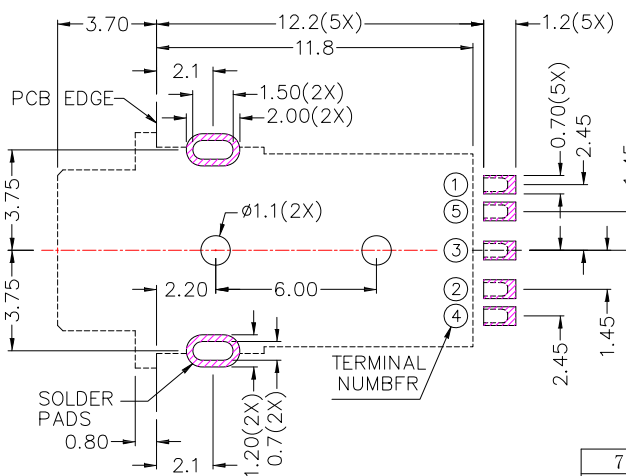
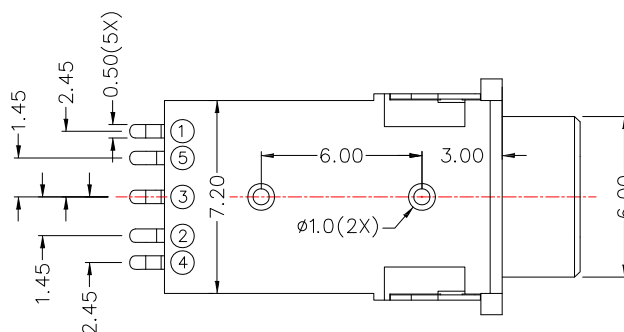


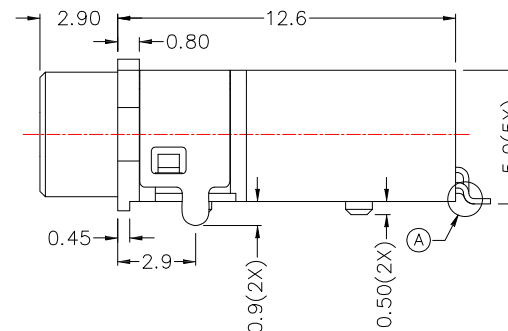
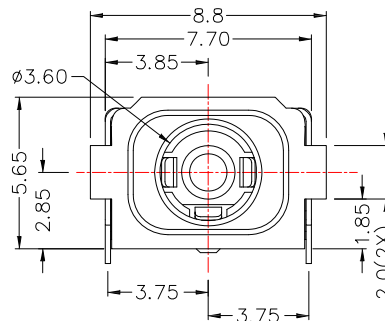
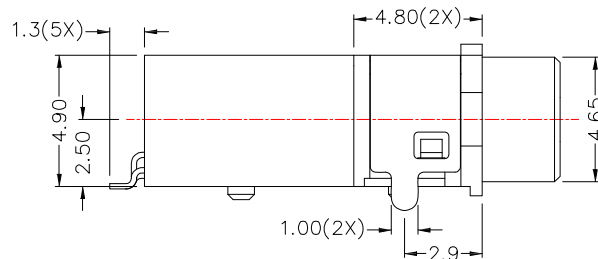




RECOMMENDED
SOLDER PAD LAYOUT
(TOP VIEW)



SPECIFICATION

1. Rating : DC 12V 1.0A
2. Contact resistance : $\leq 50m\Omega$
3. Insulation resistance : $\geq 100M\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. Life test : 5,000 cycles
7. Waterproof Level: IPX7

7	HOUSING	1	PA10T	
6	SHIELD	1	BRASS	Ni-Plating
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 08/24/21
DATE: 08/24/21
DATE: 08/24/21

MAT'L		TITLE	JACK
FINISH		MODLE	3.5mm PHONE JACK 防水型
SCALE	1 : 1	DWG NO.	PJ-WP30015DS
SHEET NO.	1 of 1	PART NO.	PJ-WP30015DS

SIZE
A4
VER
R4