

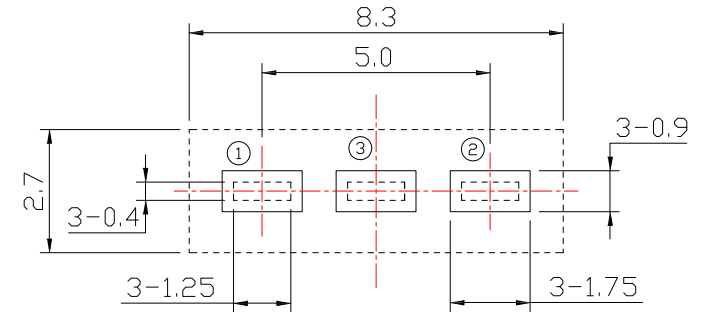
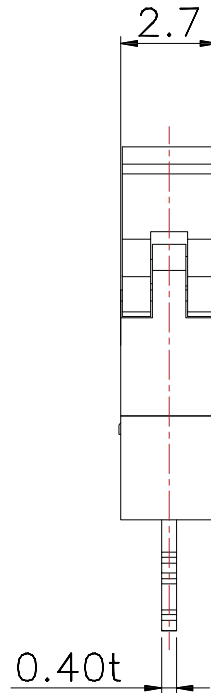


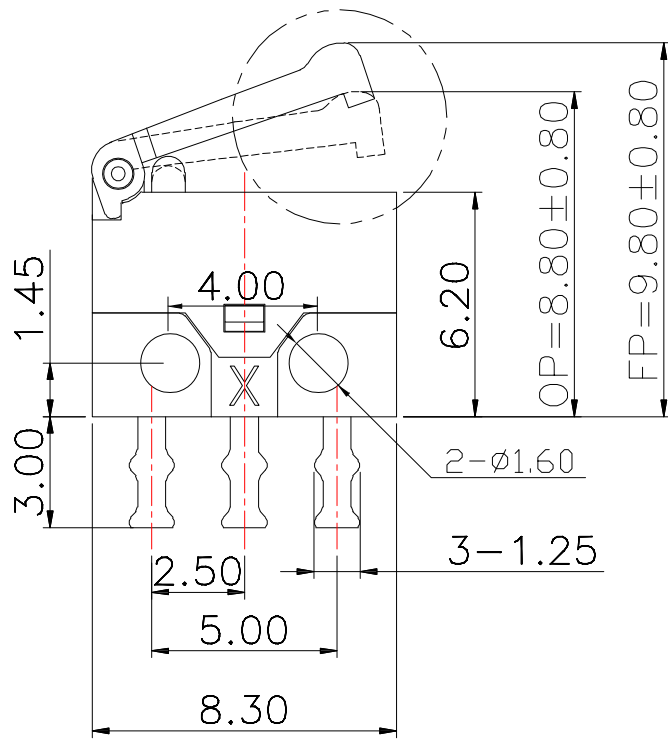

P.C.B LAYOUT

SPECIFICATIONS

Rating	DC 12V, 0.1A.
Contact Resistance	100mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	40±10 gf
Mechanical Life	20,000 cycles



7	PRESS HANDLE	PA66	1	BLACK
6	CONTACT POINT	Ag	1	
5	CONTACT	BeCu	1	
4	KNOB	PA66	1	WHITE
3	COVER	PA66	1	BLACK
2	TERMINAL	BRASS	3	Ag PLATED
1	BASE	PA66	1	BLACK
NO	NAME	MATERIAL	QTY	FINISHING

				CONTACT建倚科技股份有限公司 CONTACT TECHNOLOGY CORP.					DRAWN BY:	DATE	MAT'L		TITLE	SWITCH	
									Jack Lu	10/24/23		FINISH		MODLE	MICRO SWITCH
4	更新Mechanical Life	Jack	102423	TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3	3RD. ANGEL'S		UNITS	MM	CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	SSM-001A-40-S379	SIZE
3	更新材質表	Jack	110322						Jacky Chen	10/24/23					A4
2	更新圖面	Jack	061121						APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	SSM-001A-40-S379	R5
1	更新料號	Jack	050521						Tony Kao	10/24/23					
ITEM NO.	DESCRIPTION	DRAWN	DATE												
A	B	C	D	E	F	G	H	I	J						