

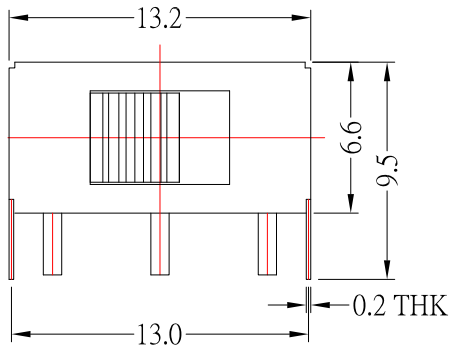
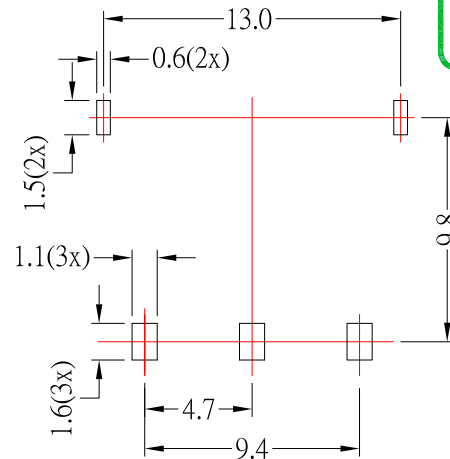


SCHEMATIC (NON-SHORTING)

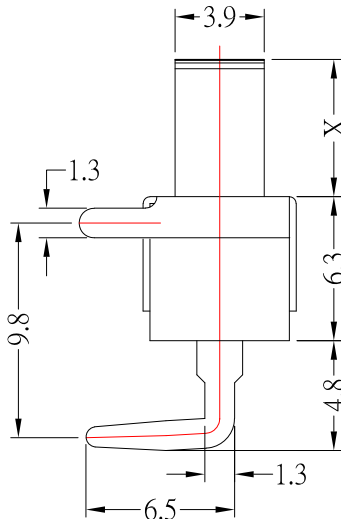

P.C.B LAYOUT
BOTTOM VIEW

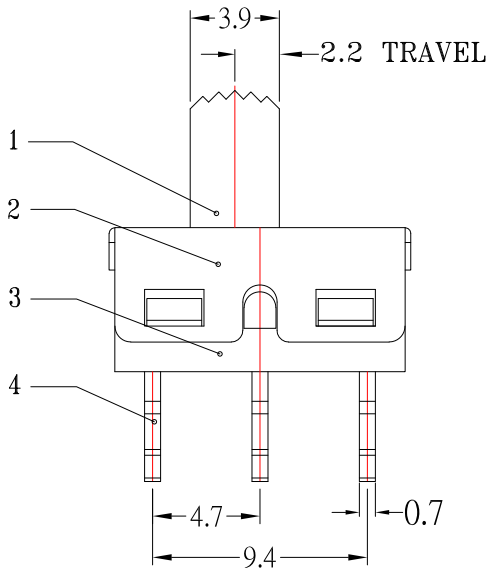

Model No.	X(mm)
SS-12D11-GA3	3mm
SS-12D11-GA4	4mm
SS-12D11-GA5	5mm
SS-12D11-GA6	6mm
SS-12D11-GA7	7mm
SS-12D11-GA8	8mm
SS-12D11-GA9	9mm
SS-12D11-GA10	10mm

SPECIFICATIONS

- 1.RATING: 50V AC , 0.5A
- 2.CONTACT RESISTANCE: 200 m Ω Max
- 3.INSULATION RESISTANCE: 100 M Ω Min
- 4.OPERATING FORCE: 250 $\pm$ 100gf
- 5.LIFE:10,000 CYCLES

7	STEEL BALL	STEEL	1	NATURAL
6	SPRING	STEEL WIRE	1	NATURAL
5	CONTACT	BRASS	1	Ag PLATED
4	TERMINAL	BRASS	3	Ag PLATED
3	CASE	PA9T	1	BLACK
2	COVER	SUS	1	NATURAL
1	KNOB	PA9T	1	BLACK
NO.	PARTS	MATERIALS	Q'TY	FINISH

10	新增PCB LAYOT尺寸	Jack	091125
9	更新尺寸	Jack	110122
8	更新柄長選項	Jack	011420
7	新增PCB LAYOT尺寸	Jack	010319
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	09/11/25	FINISH	MODLE	SLIDE SWITCH
CHECKED BY:	DATE	SCALE	DWG NO.	SS-12D11-GAx-S191
Jacky Chen	09/11/25	1 : 1	PART NO.	SS-12D11-GAx-S191
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	09/11/25			