

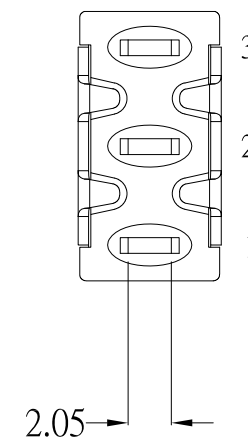
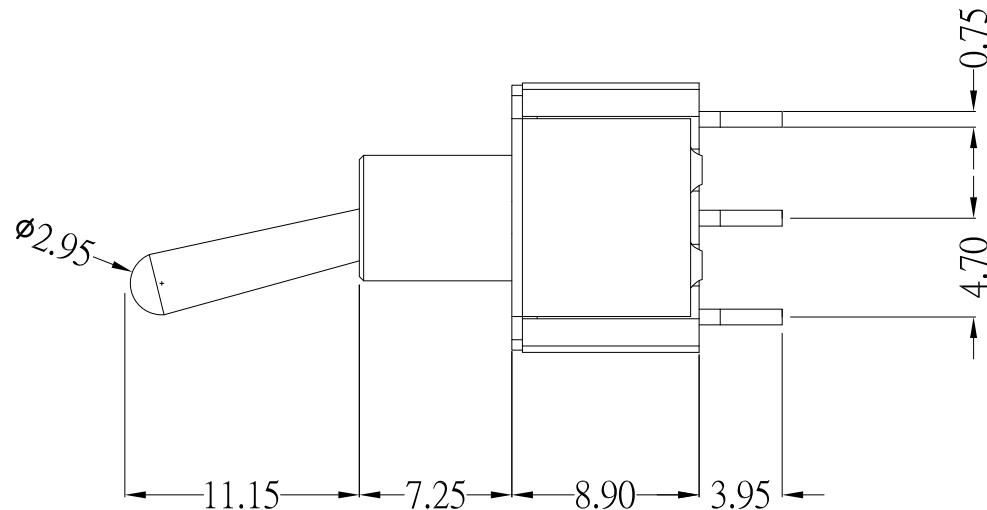



KEYWAY

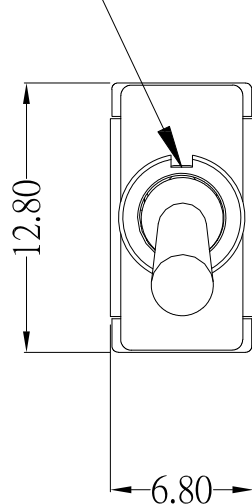

PRODUCT IMAGE

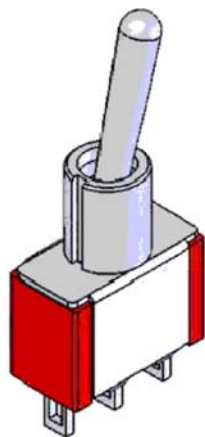

SCHEMATIC



SPECIFICATIONS:

CONTACT RATING : 5 AMPS / 120V AC or 28V DC
2 AMPS / 250V AC or 0.4VA AMPS @ 20V AC or DC
20VELECTRICAL LIFE : 50,000 make-and-break cycles at full load.
CONTACT RESISTANCE : 10 mΩ max. initial @ 2-4 VDC
100 mA , for both coin silver and gold plated contacts.
INSULATION RESISTANCE : 1,000 MΩ min
DIELETRIC STRENGTH : 1,000 V RMS @ sea level.
OPERATING TEMPERTURE : -30°C to 130°C

MTAERIALS:

CASE : Dially phthalate (DAP)(UL-94V-0)
ACTUATOR : Brass,chrome plated.
BUSHING : Brass. nickel plated.
HOUSING : Stainless steel.
TERMINAL/CONTACT : Brass , witch silver or gold plated.
or gold over silver
SWITCH SUPPORT : Brass , tin plated.

Model No.	Switching Position		
	ON	NONE	ON
T101	ON	NONE	ON
T102	ON	NONE	(ON)
T103	ON	OFF	ON
T104	(ON)	OFF	(ON)
T105	ON	OFF	(ON)
Term Comm.	2-3	OPEN	2-1

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°
3RD. ANGEL'S
UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Frank Wu	01/03/12	FINISH	MODLE	TOGGLE ROCKER SWITCH
CHECKED BY:	DATE	SCALE	DWG NO.	T10xT1B4A1
Jacky Chen	01/03/12	1 : 1	PART NO.	T10xT1B4A1
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	01/03/12			