

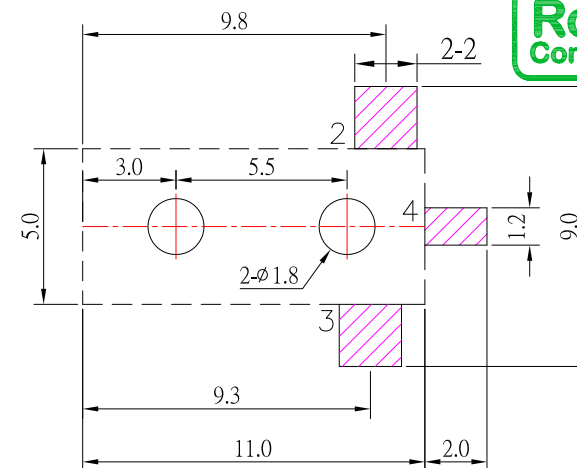
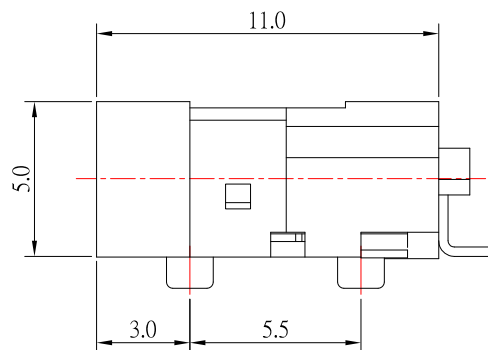
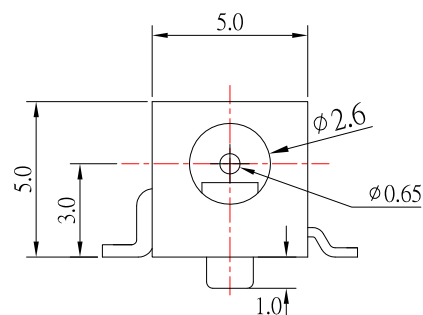



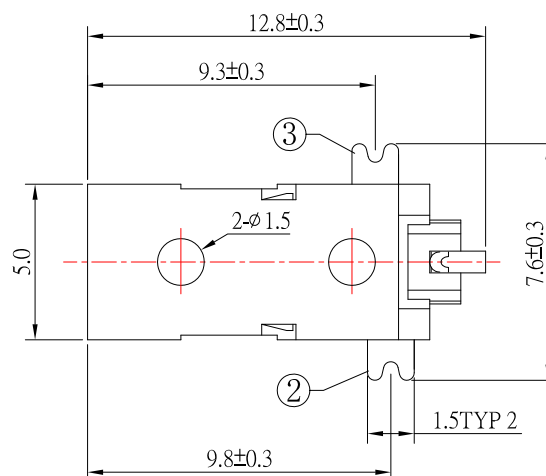


P.C.B LAYOUT
TOP VIEW

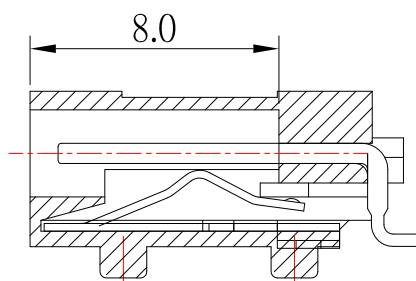

SCHEMATIC

SPECIFICATION

- Rating : DC 30V, 1.0A ;
- Contact resistance : $\leq 30m\Omega$;
- Insulation resistance : $\geq 100M\Omega$;
- Withstand voltage : 500VAC ;
- Insertion and extraction force : 3-15N;
- life test : 5,000 cycles .

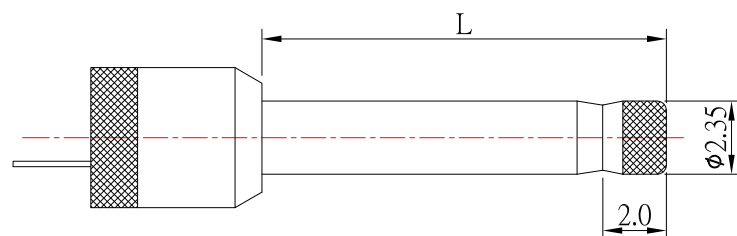

RECOMMENDED PLUG

④	PIN	1	BRASS	Ag-Plating
③	SPRING	1	PHOSPHOR BRONZE	Ag-Plating
②	FLAT PIECE	1	BRASS	Ag-Plating
①	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
DRAWN BY:	DATE	MATL	TITLE	JACK
Jack Lu	02/27/20	FINISH	MODLE	DC JACK
CHECKED BY:	DATE	SCALE	DWG NO.	DC-031H-S124
Jacky Chen	02/27/20	SHEET NO.	PART NO.	DC-031H-S124
APPROVED BY:	DATE			
Tony Kao	02/27/20			



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	更新尺寸	Jack	022720
1	更新尺寸	Jack	042718