
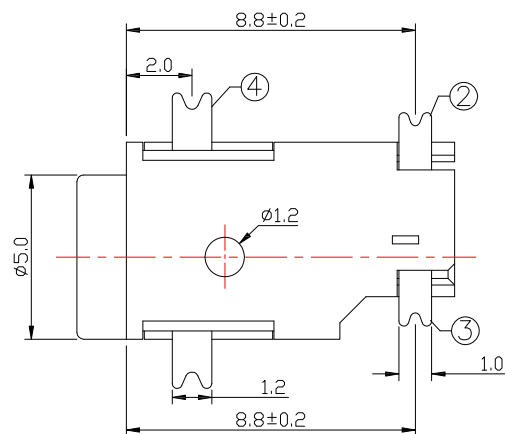
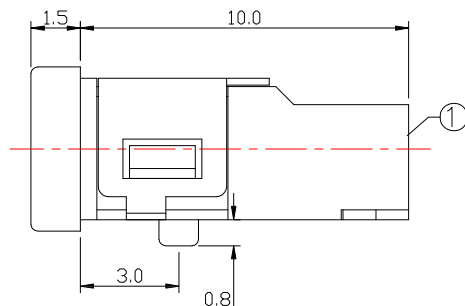
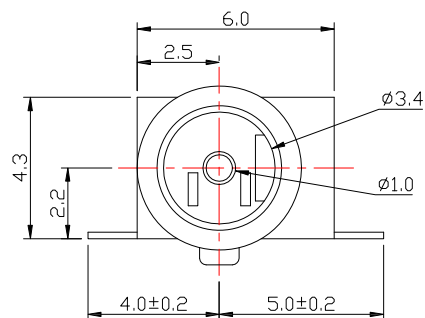


PLUG

MODEL NO.	DC-043D-1.0
SCHEMATIC	

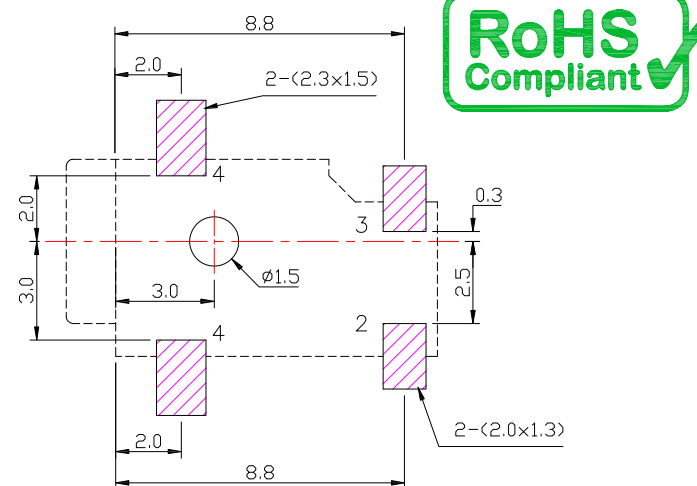

P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)

SPECIFICATION

- 1.Rating : DC 30V , 2.0A
- 2.Contact resistance : $\leq 30m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 2-20N
- 6.life test : 5,000 cycles

④	CONTACT FOOT	1	Phosphor Bronze	Au-Plating
③	PIN	1	Phosphor Bronze	Au-Plating
②	SPRING PIECE	1	Phosphor Bronze	Au-Plating
①	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	REMARK
DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	01/05/18	FINISH	MODLE	DC JACK
CHECKED BY:	DATE	SCALE	DWG NO.	DC-043D-1.0-S124
Jacky Chen	01/05/18	1 : 1	PART NO.	DC-043D-1.0-S124
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	01/05/18			

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	--------------	-------	----