
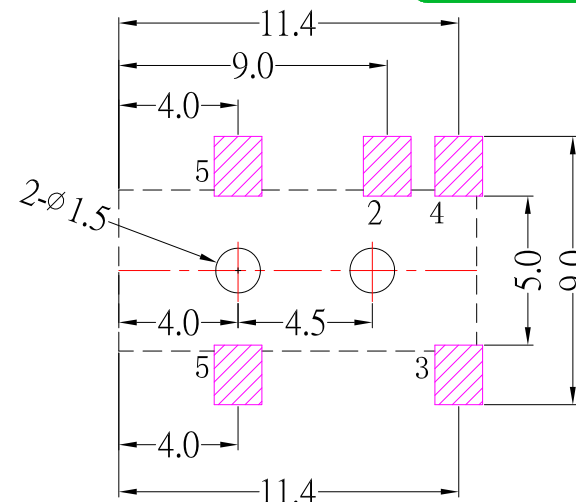
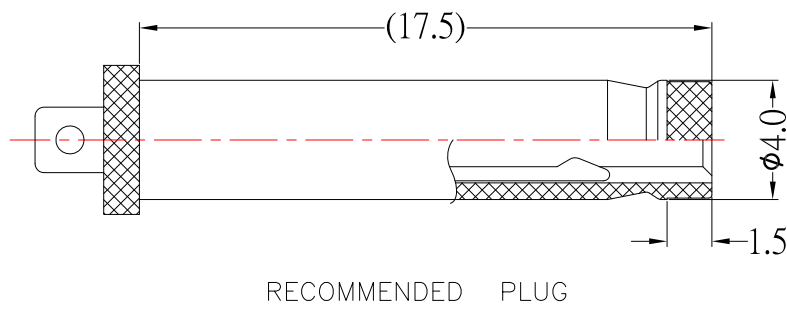
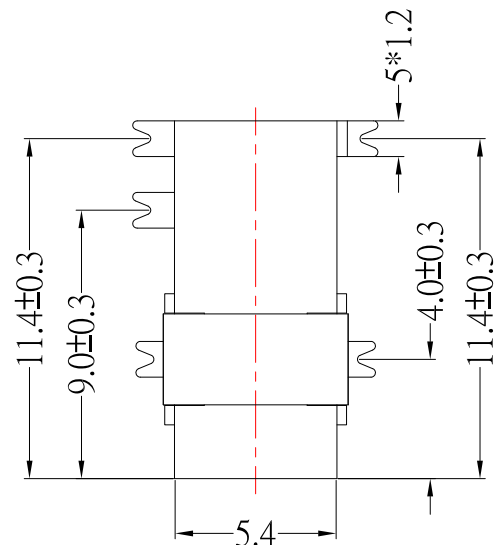





P.C.B LAYOUT
TOP VIEW

SPECIFICATION

- 1.Rating : DC 30V, 3.0A ;
- 2.Contact resistance : $\leq 30m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3~30N;
- 6.life test : 5,000 cycles °

MODEL NO.	DC-059DS-1.65
SCHEMATIC	
CENTER PIN	$\phi 1.65mm$



⑤	CONTACT FOOT	1	BRASS	Ag-Plating
④	PIN	1	BRASS	Ag-Plating
③	CURVE PIECE	1	BRASS	Ag-Plating
②	SPRING	1	PHOSPHOR BRONZE	Ag-Plating
①	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DRAWN BY:	DATE	MATL	TITLE	JACK
Jack Lu	12/13/22			
CHECKED BY:	DATE	FINISH	MODLE	DC JACK
Jacky Chen	12/13/22			
APPROVED BY:	DATE	SCALE	DWG NO.	DC-059DS-1.65-S124
Tony Kao	12/13/22	1 : 1		
		SHEET NO.	PART NO.	DC-059DS-1.65-S124
		1 of 1		

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2	3RD. ANGEL'S	UNITS	MM
	Above 5 ~ 15 ±0.3			
	Above 15 ~ 30 ±0.4			
	Above 30 ~ 50 ±0.5			
	Angle ±0.3°			

5	更新圖面	Jack	121322
4	更新SPEC	Jack	091918
3	更新圖面	Jack	081718
2	更新Insertion and extraction force	Jack	032018
1	更新Rating	Jack	102017
ITEM NO.	DESCRIPTION	DRAWN	DATE