

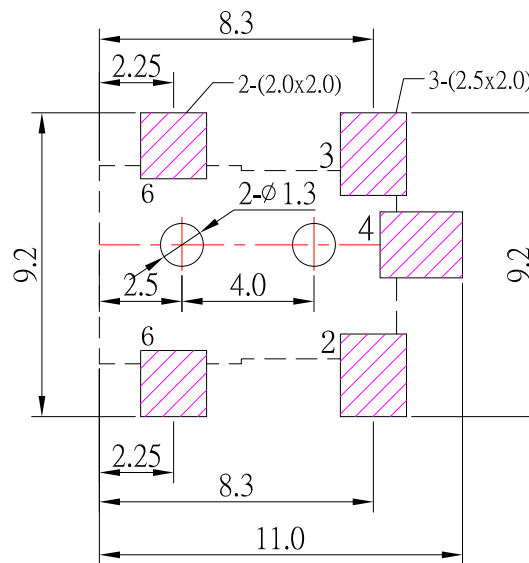
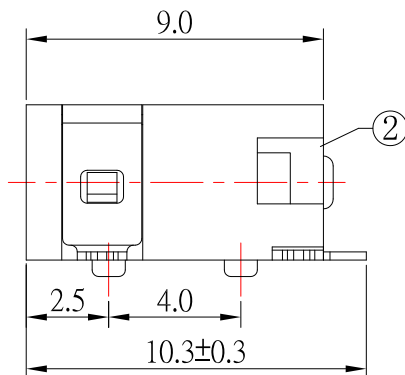
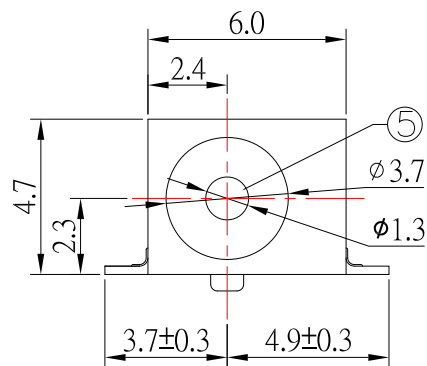





Model NO.	DC-073DS-1.3
SCHEMATIC	 3/5 (+) 4 2 (-)

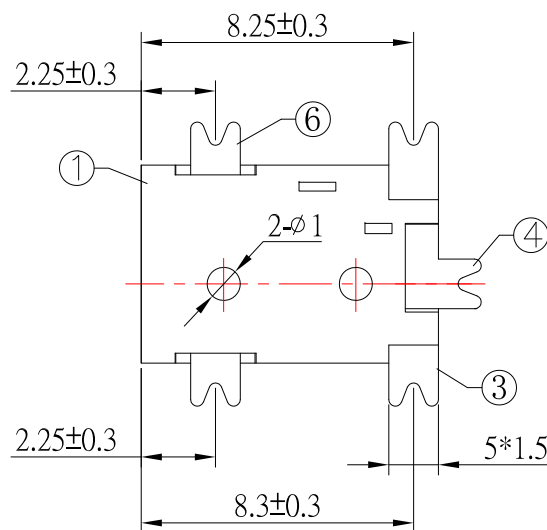

P.C.B LAYOUT
TOP VIEW

SPECIFICATION

- 1.Rating : DC 30V , 2.0A ;
- 2.Contact resistance : $\leq 30m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles °

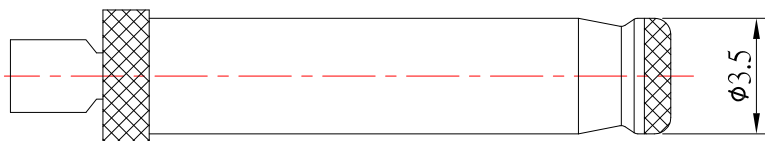

RECOMMENDED PLUG

6	CONTACT FOOT	1	BRASS	Ag-Plating
5	PIN	1	H59	Ni-Plating
4	CONTACT FOOT	1	BRASS	Ag-Plating
3	CURVE PIECE	1	BRASS	Ag-Plating
2	SPRING	1	PHOSPHOR BRONZE	Ag-Plating
1	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

5	更新圖面	Jack	081722
4	更新料號	Jack	080621
3	更新料號	Jack	101817
2	更新為AO版	Jack	042117
1	更新圖面	Jack	021617
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED	Up to 5 ±0.2 Above 5 ~ 30 ±0.3 Above 30 ~ 50 ±0.4 Above 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
-----------------------------------	---	--------------	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	08/17/22	FINISH	MODLE	DC JACK
CHECKED BY:	DATE	SCALE	DWG NO.	DC-073DS-1.3-S124
Jacky Chen	08/17/22	1 : 1	PART NO.	DC-073DS-1.3-S124
APPROVED BY:	DATE	SHEET NO.	1 of 1	SIZE A4 VER R5
Tony Kao	08/17/22			