

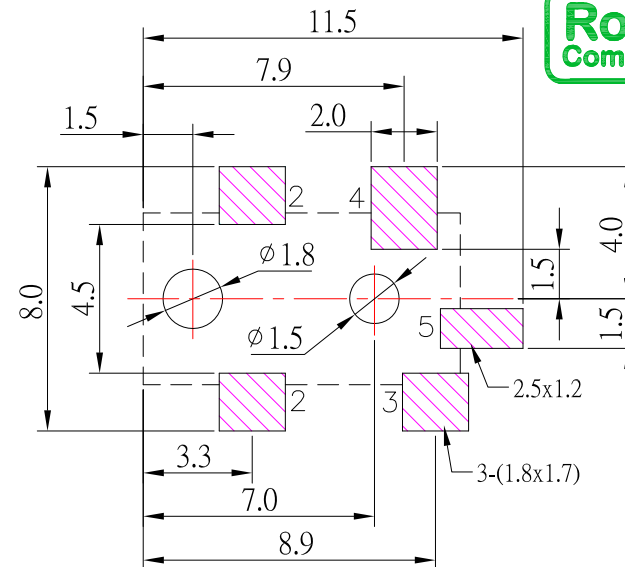
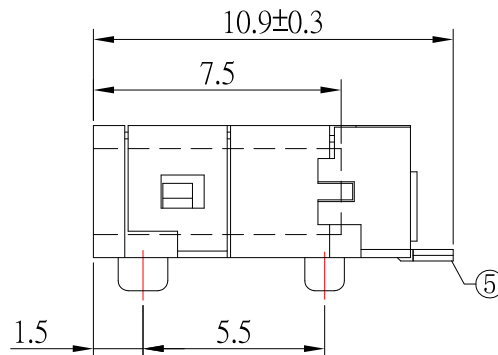
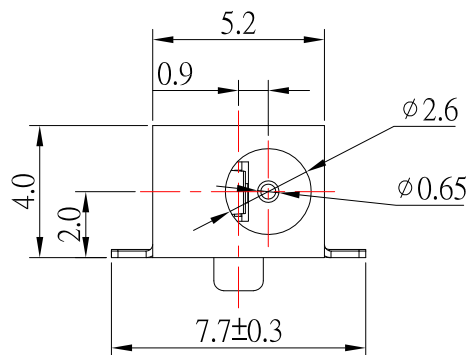
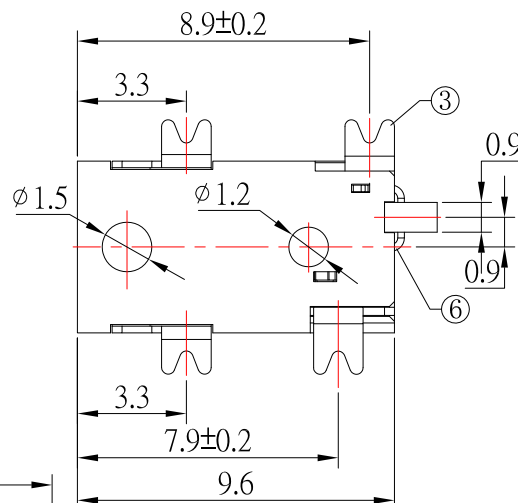


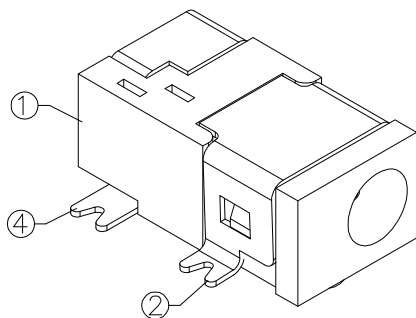


P.C.B LAYOUT
TOP VIEW



MODEL NO.	DC-S041-0.65
SCHEMATIC	

SPECIFICATIONS

- Rating : DC 30V , 1.0A ;
- Contact resistance : $\leq 30\text{m}\Omega$;
- Insulation resistance : $\geq 100\text{M}\Omega$;
- Withstand voltage : 500VAC ;
- Insertion and extraction force : 2-20N ;
- life test : 5,000 cycles .

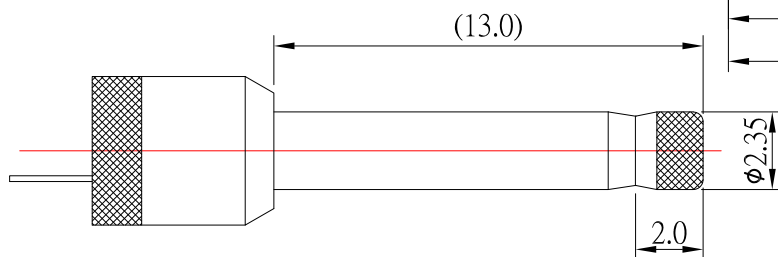

RECOMMENDED PLUG

6	CONTACT FOOT	1	BRASS	Ag-Plating
5	PIN	1	BRASS	Ag-Plating
4	SPRING	1	PHOSPHOR BRONZE	Ag-Plating
3	CURVE PIECE	1	BRASS	Ag-Plating
2	CONTACT FOOT	1	BRASS	Ag-Plating
1	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 07/23/19

CHECKED BY: Jacky Chen
DATE: 07/23/19

APPROVED BY: Tony Kao
DATE: 07/23/19

MATL		TITLE	JACK
FINISH		MODLE	DC JCAK
SCALE	1 : 1	DWG NO.	DC-S041-0.65-S124
SHEET NO.	1 of 1	PART NO.	DC-S041-0.65-S124

SIZE
A4
VER
R5