



MODEL NO.	PJ-2816D	PJ-2814D
SCHEMATIC		

SPECIFICATION

1. Rating : DC 12V 1.0A
2. Contact resistance : $\leq 50m\Omega$
3. Insulation resistance : $\geq 100M\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. life test : 5,000 cycles

*MATERIAL

TERMINAL 1 : PHOSPHOR BRONZE
 TERMINAL 2 : PHOSPHOR BRONZE
 TERMINAL 3 : PHOSPHOR BRONZE
 TERMINAL 4 : PHOSPHOR BRONZE
 TERMINAL 10 : BRASS
 TERMINAL 11 : BRASS
 HOUSING : PA6T

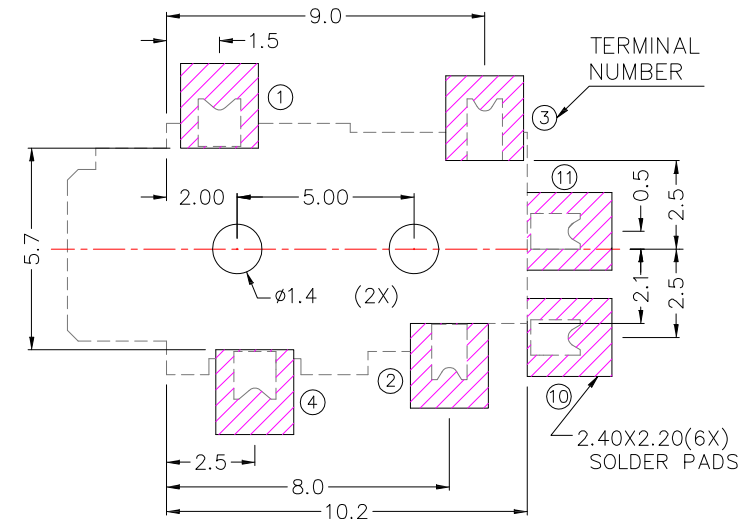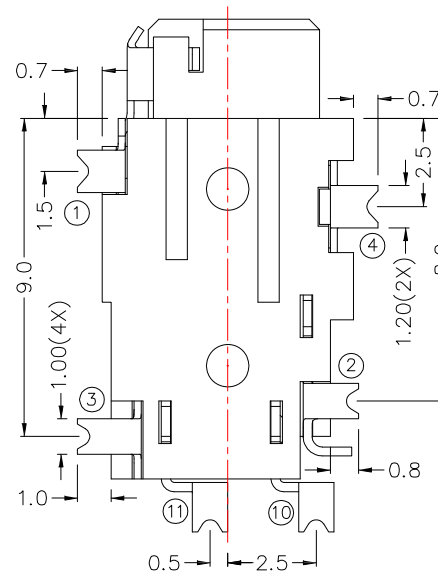

RECOMMENDED
SOLDER PAD LAYOUT