


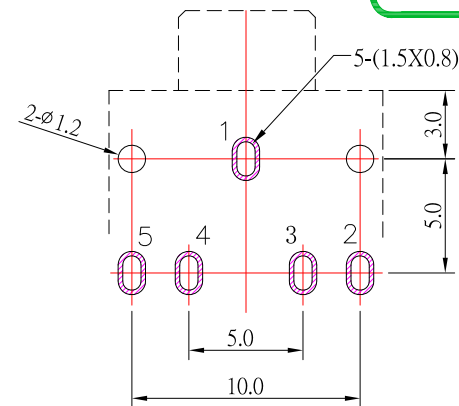
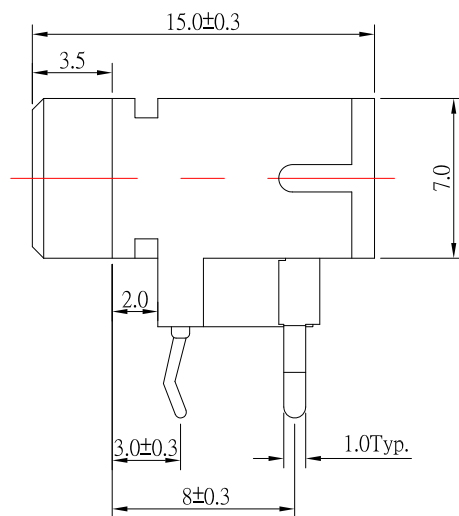
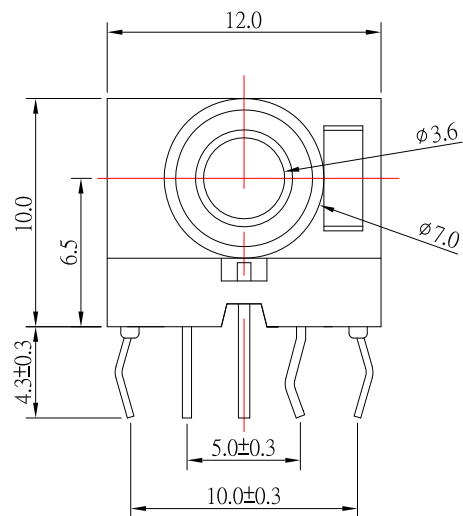


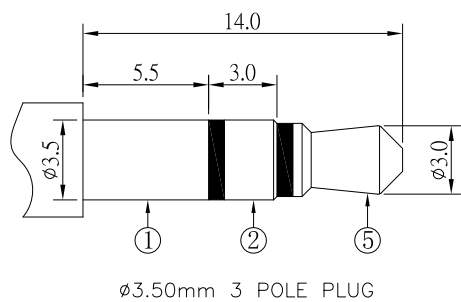

P.C.B LAYOUT
(TOP VIEW)



3.50mm 3 POLE PLUG

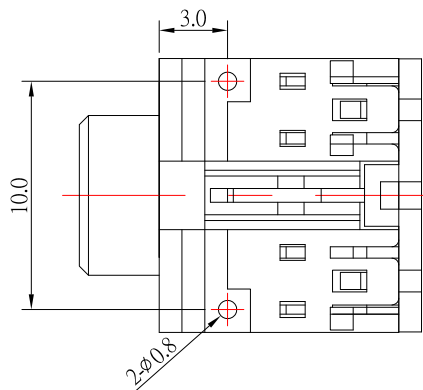

SPECIFICATION

- Rating : DC 30V, 1.0A ;
- Contact resistance : $\leq 30m\Omega$;
- Insulation resistance : $\geq 100M\Omega$;
- Withstand voltage : 500VAC ;
- Insertion and extraction force : 3-30N
- life test : 5,000 cycles .

7	COVER	1	PBT	
6	HOUSING	1	PBT	
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
4	4# CONTACT FOOT	1	BRASS	Sn-Plating
3	3# CONTACT FOOT	1	BRASS	Sn-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
1	1# CONTACT FOOT	1	BRASS	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

7	更新圖面	Jack	022324
6	更新樣式及尺寸	Jack	112922
5	更新樣式及尺寸	Jack	072121
4	更新樣式及尺寸公差	Jack	070821
3	更新樣式	Jack	090518
2	更新為A0版	Jack	011017
1	更新SPEC	Jack	122916
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	02/22/24			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	02/22/24			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-3565-S124
Tony Kao	02/22/24	1 : 1		
		SHEET NO.	PART NO.	PJ-3565-S124
		1 of 1		
				SIZE A4
				VER R7