

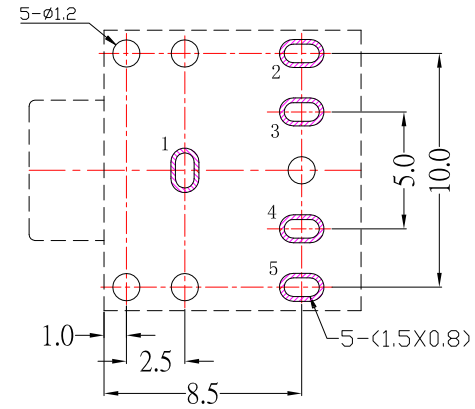
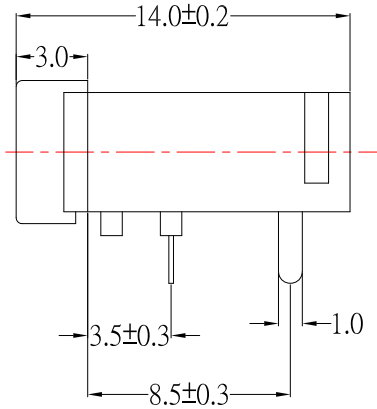
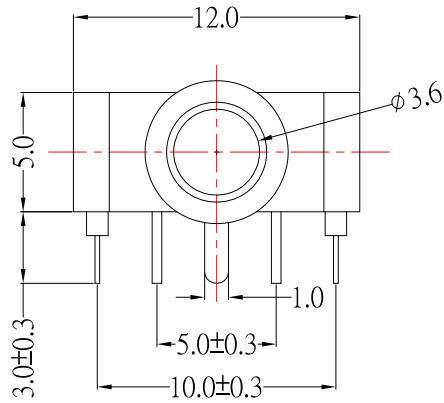



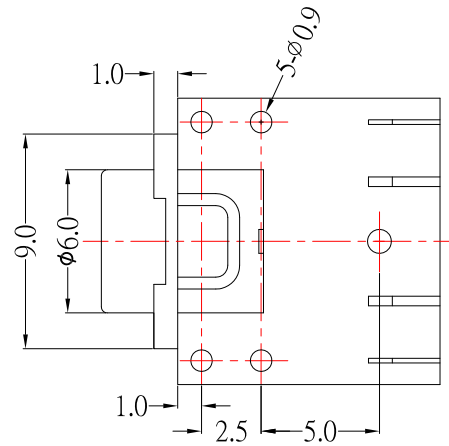

P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)

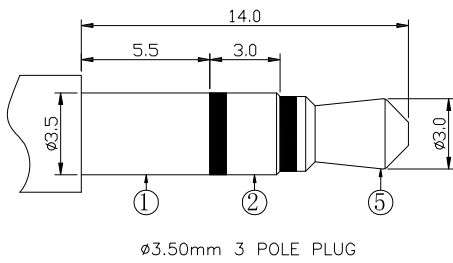

SPECIFICATION

- Rating : DC 30V , 0.5A ;
- Contact resistance : $\leq 30m\Omega$;
- Insulation resistance : $\geq 100M\Omega$;
- Withstand voltage : 500VAC ;
- Insertion and extraction force : 3-20N
- life test : 5,000 cycles .

6	HOUSING	1	PBT	
5	CONTACT FOOT #5	1	Phosphor Bronze	Sn-Plating
4	CONTACT FOOT #4	1	Brass	Sn-Plating
3	CONTACT FOOT #3	1	Brass	Sn-Plating
2	CONTACT FOOT #2	1	Stainless Steel	Sn-Plating
1	CONTACT FOOT #1	1	Phosphor Bronze	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	REMARK
DRAWN BY: Jack Lu		DATE: 04/12/22	MAT'L:	TITLE: JACK
CHECKED BY: Jacky Chen		DATE: 04/12/22	FINISH:	MODLE: PHONE JACK
APPROVED BY: Tony Kao		DATE: 04/12/22	SCALE: 1 : 1	DWG NO. PJ-3615-S124
			SHEET NO. 1 of 1	PART NO. PJ-3615-S124
				SIZE: A4
				VER: R2

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

2	更新圖面和料號	Jack	041222
1	更新plug圖	Jack	052418
ITEM NO.	DESCRIPTION	DRAWN	DATE

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM