




P.C.B LAYOUT
TOP VIEW

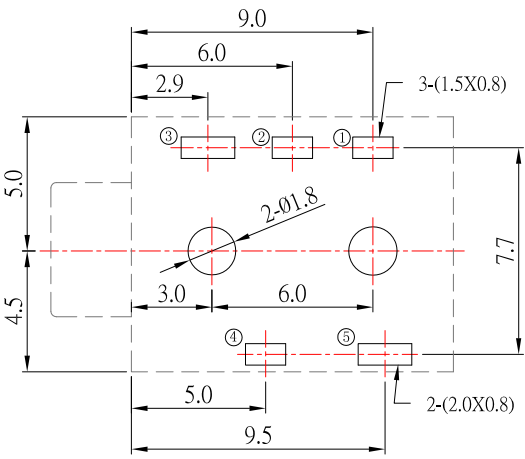

SPECIFICATION

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : $\leq 0.05 \Omega$;
- 3.Insulation resistance : $\geq 100M \Omega$ (DC250V) ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °

SCHEMATIC

PJ-3675-S125	PJ-3674B-S125	PJ-3674A-S125	PJ-3673-S125	PJ-3673A-S125

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

04/23/13

CHECKED BY:

Jacky Chen

DATE

04/23/13

APPROVED BY:

Tony Kao

DATE

04/23/13

MAT'L

FINISH

SCALE

1 : 1

TITLE

JACK

MODLE

PHONE JACK

DWG NO.

PJ-367x-S125

PART NO.

PJ-367x-S125

SIZE

A4

VER

A0