





P.C.B LAYOUT
TOP VIEW

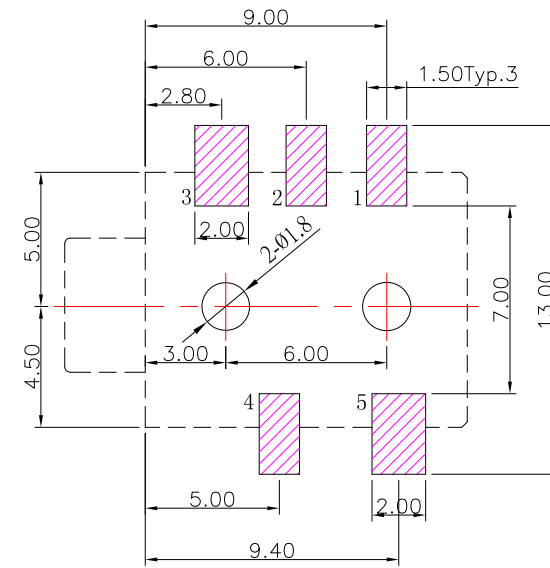

SCHEMATIC

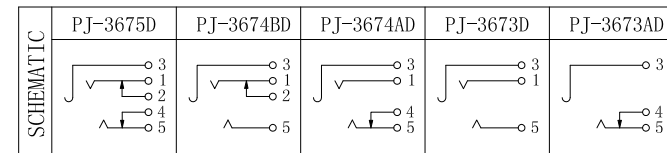

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
7	COVER	1	PA9T	
6	HOUSING	1	PA9T	
5	SPRING	1	BRONZE	Au-Plating
4	CONTACT FOOT	1	BRASS	Au-Plating
3	CONTACT FOOT	1	BRONZE	Au-Plating
2	CONTACT FOOT	1	BRASS	Au-Plating
1	SPRING	1	BRONZE	Au-Plating

SPECIFICATION

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : $\leq 0.03 \Omega$;
- 3.Insulation resistance : $\geq 100M \Omega$ (DC250V) ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles °

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	10/17/12		MODLE	PHONE JACK
CHECKED BY:	DATE	SCALE	DWG NO.	PJ-367xD-S125
Jacky Chen	10/17/12	1 : 1	PART NO.	PJ-367xD-S125
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	10/17/12			

ITEM NO.	DESCRIPTION	DRAWN	DATE