

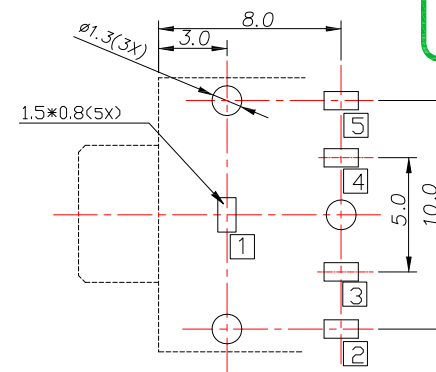
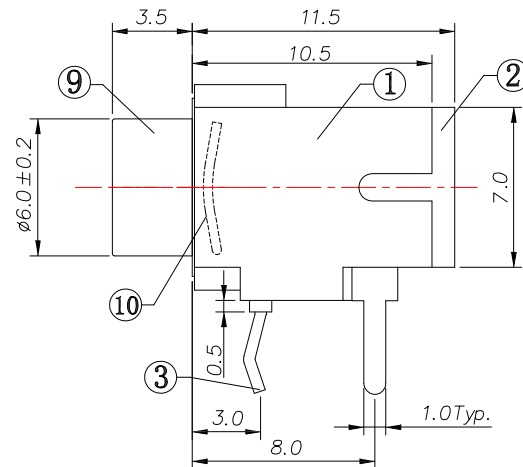
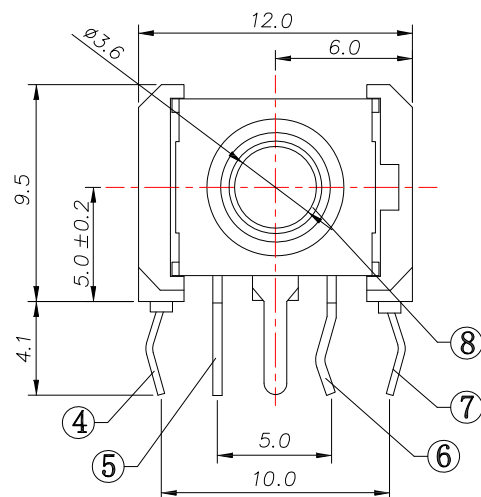


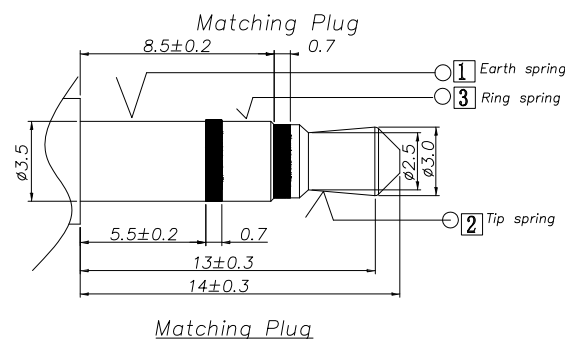

P.C.B LAYOUT

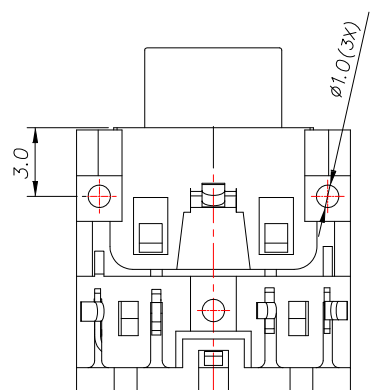

Model No.	PJ-3685	PJ-3684A	PJ-3683A	PJ-3683	PJ-3682
Schematic					

□: TERMINAL NO.

PJ-368x-x-S141

COLOR :

Pink: PI

Green: GR

SPECIFICATION

- Rating : DC 30V 0.5A
- Contact resistance : $\leq 30m\Omega$
- Insulation resistance : $\geq 100M\Omega$
- Withstand voltage : 500VAC
- Insertion and extraction force : 3-30N
- life test : 5,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
⑩	spring	1	SPRING WIRE	Ni-Plating
⑨	Bushing	1	PBT	
⑧	Bushing	1	COPPER ALLOY	Ni-Plating
⑦	Tip spring	⑤	PHOSPHOR BRONZE	Tin/Ag-Plating
⑥	Shurt terminal	④	BRASS	Tin/Ag-Plating
⑤	Shurt terminal	③	BRASS	Tin/Ag-Plating
④	Ring spring	②	PHOSPHOR BRONZE	Tin/Ag-Plating
③	Earth spring	①	BRASS	Tin/Ag-Plating
②	Cover	1	PBT	Black
①	Housing	1	PA66	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 10/15/18
DATE: 10/15/18
DATE: 10/15/18

MAT'L
FINISH
SCALE
SHEET NO.

1 : 1
1 of 1

TITLE
MODLE
DWG NO.
PART NO.

JACK
PHONE JACK
PJ-368x-x-S141
PJ-368x-x-S141

SIZE
A4
VER
R1