


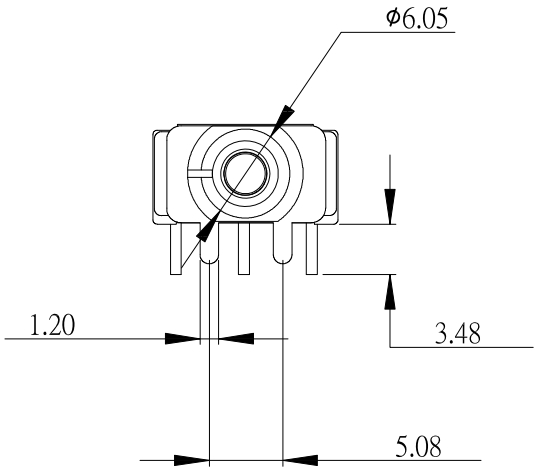


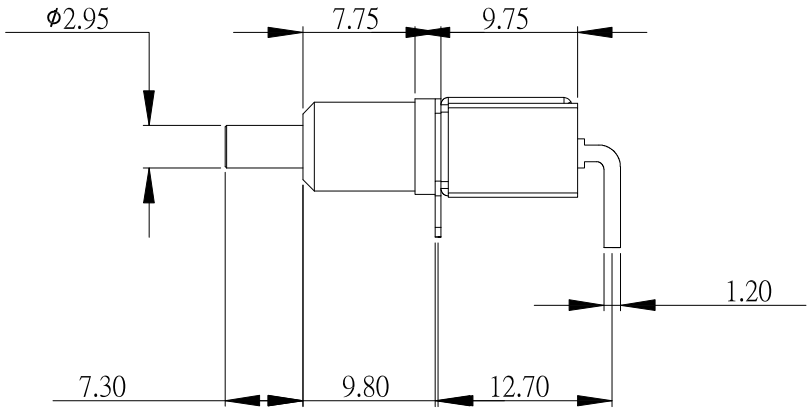


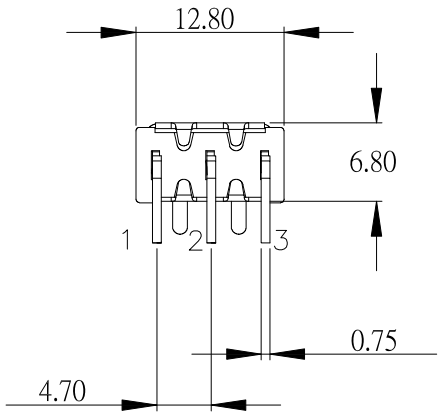




Model No.	Switcning Position		
B101	ON	NONE	ON
Term Comm.	2-3	OPEN	2-1

SCHEMATIC



PCB LAYOUT MOUNTING



SPECIFICATIONS:
CONTACT RATING : 3 AMPS @120V AC or 28 VDC.
1 AMPS @250V AC or 0.4VA AMPS @ 20 V AC or DC
ELECTRICAL LIFE : 6,000 make-and break cycles at full load.
CONTACT RESISTANCE : 10 mΩ max. inital @ 2-4 VDC.
100 mA , for both coin silver and gold plated contacts.
INSULATION RESISTANCE : 1,000 MΩ min.
DIELETRIC STRENGTH : 1,000 V RMS @ sea level.
OPERATING TEMPERATURE : -30˚C to 130 ˚C

MATERIALS:
CASE : Diallyl phthalate (DAP)(UL-94V-0).
PLUNGER : Polybutylene terephathalate (PBT) (UL 94V-0)
BUSHING : ZINC ALLOY.
HOUSING : Stainless steel.
TERMINAL/CONTACT : Brass, with silver or gold plated.
or gold over silver
SWITCH SUPPORT : Brass, tin plated.

ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2; Above 5 ~ 15 ±0.3; Above 15 ~ 30 ±0.4; Above 30 ~ 50 ±0.5; Angle ±0.3˚
3RD. ANGEL'S
UNITS MM

		DATE
DRAWN BY:	Frank Wu	09/20/11
CHECKED BY:	Jacky Chen	09/20/11
APPROVED BY:	Tony Kao	09/20/11

MAT'L		TITLE	SWITCH
FINISH		MODLE	TOGGLE PUSH SW
SCALE	1 : 1	DWG NO.	TG-B101P1B2A3
SHEET NO.	1 of 1	PART NO.	TG-B101P1B2A3

SIZE A4
VER A