
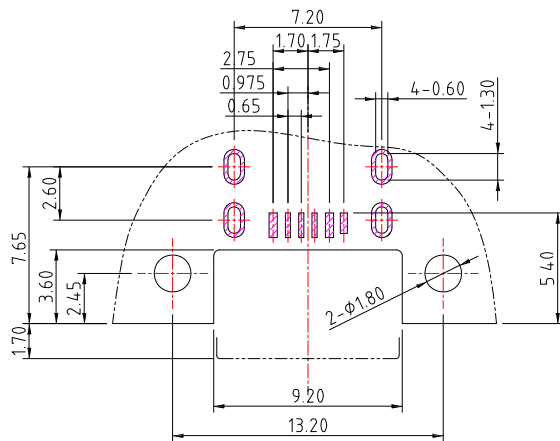
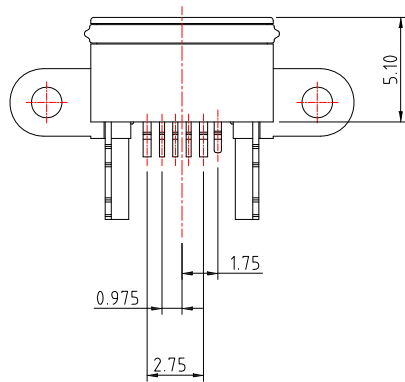

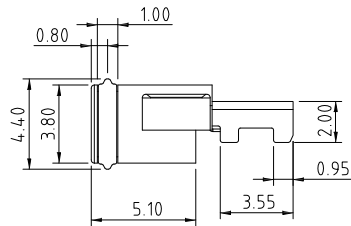
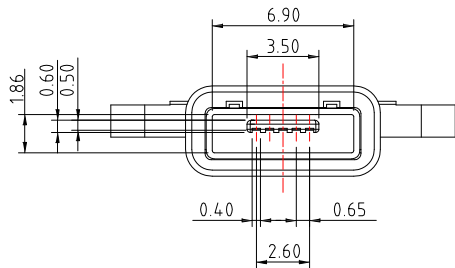



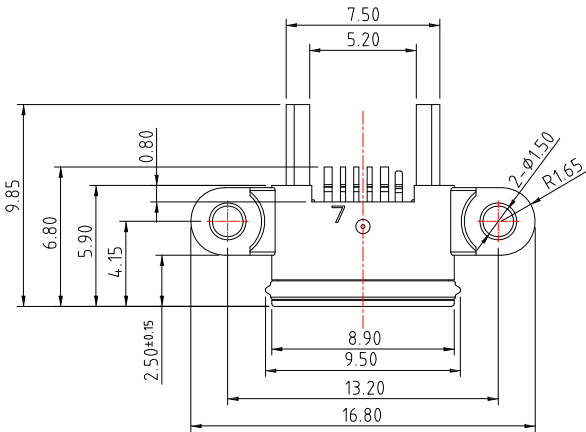

P.C.B LAYOUT MOUNTING PATTERN

- NOTES:
- MATERIAL:
- 1.1 HOUSING: LCP & PA9T,
 - 1.2 CONTACT: PHOSPHOR BRONZE
 - 1.3 SHELL: SUS
 - 1.4 WATERPROOF RING: SILICONE RUBBER
- FINISH:
- 2.1 CONTACT: PLATED GOLD IN MATING AREA ;
GOLD PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL
 - 2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER
- 3.SPECIFICATION:
- 3.1 RATING: 30V DC/AC , 1.0A
 - 3.2 DIELECTRIC WITHSSTANDING VOLTAGE: 500 VAC
 - 3.3 CONTACT RESISTANCE: 30 mΩ MAX.
 - 3.4 INSULATION RESISTANCE: 500 MΩ MIN.
 - 3.5 TEMPERATURE RANGE: -20℃ ~ +60℃

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	09/09/16			
CHECKED BY:	DATE	FINISH	MODLE	MICRO USB 5PIN SMT(AB)TYPE 沉板 平口防水型
Jacky Chen	09/09/16			
APPROVED BY:	DATE	SCALE	DWG NO.	SIZE
Tony Kao	09/09/16	1 : 1	MRUSB-5AB-WP5-S235	A4
		SHEET NO.	PART NO.	VER
		1 of 1	MRUSB-5AB-WP5-S235	R