


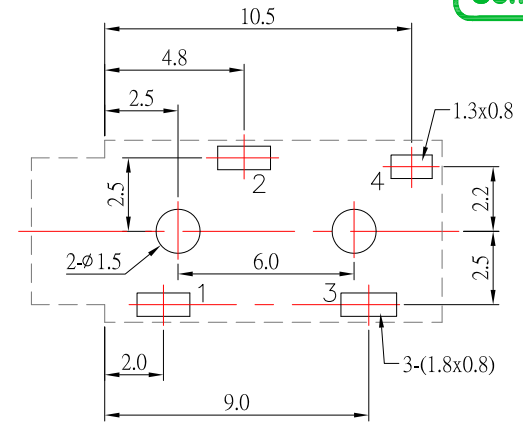
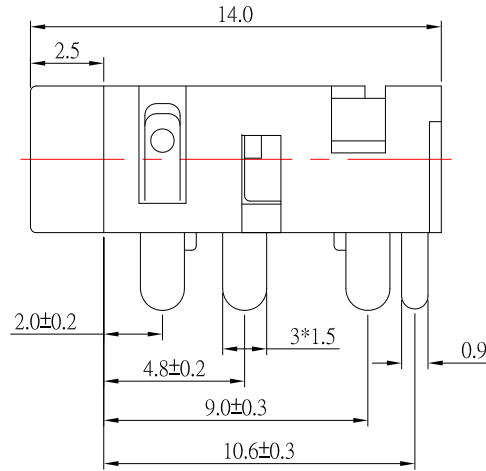
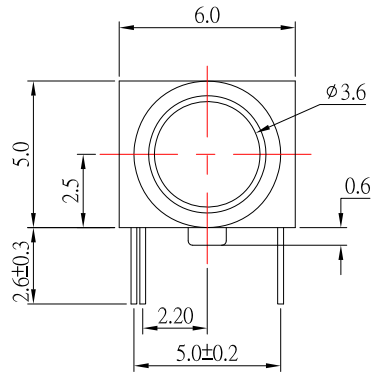


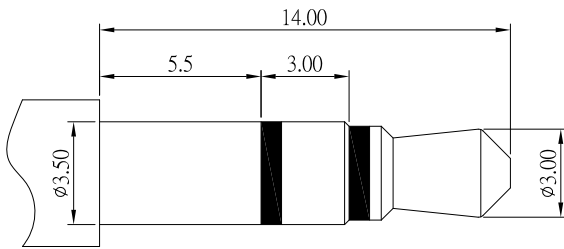

P.C.B LAYOUT  
TOP VIEW




Ø3.50mm 3 POLE PLUG

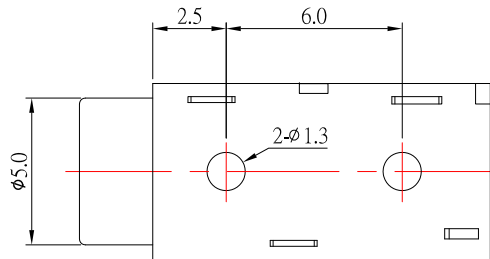

### SPECIFICATION

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance :  $\leq 30\text{m}\Omega$  ;
- 3.Insulation resistance :  $\geq 100\text{M}\Omega$  ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles °

### SCHEMATIC

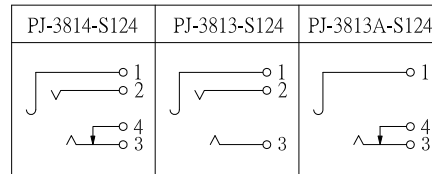

|     |              |     |                 |            |
|-----|--------------|-----|-----------------|------------|
| ⑤   | HOUSING      | 1   | PA9T            |            |
| ④   | CURVE PIECE  | 1   | BRASS           | Ag-Plating |
| ③   | SPRING PIECE | 1   | PHOSPHOR BRONZE | Ag-Plating |
| ②   | CONTACT FOOT | 1   | PHOSPHOR BRONZE | Ag-Plating |
| ①   | CONTACT FOOT | 1   | PHOSPHOR BRONZE | Ag-Plating |
| NO. | DESCRIPTION  | QTY | MATERIAL        | PLATING    |



建倚科技股份有限公司  
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :  
Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3°

3RD.  
ANGEL'S



UNITS

MM

|              |          |           |          |              |
|--------------|----------|-----------|----------|--------------|
| DRAWN BY:    | DATE     | MATL      | TITLE    | JACK         |
| Jack Lu      | 07/15/20 |           |          |              |
| CHECKED BY:  | DATE     | FINISH    | MODLE    | PHONE JACK   |
| Jacky Chen   | 07/15/20 |           |          |              |
| APPROVED BY: | DATE     | SCALE     | DWG NO.  | PJ-381x-S124 |
| Tony Kao     | 07/15/20 | 1 : 1     |          |              |
|              |          | SHEET NO. | PART NO. | PJ-381x-S124 |
|              |          |           |          | SIZE<br>A4   |
|              |          |           |          | VER<br>R4    |